
DIGITUS® CAT 6A S/FTP Patch Cable, 15 m, PUR (TPU)

DK-1644-A-PUR-150

EAN 4016032434757

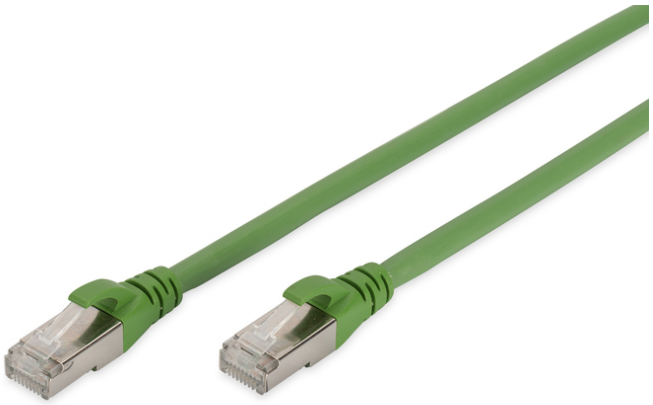

CAT 6A S-FTP patch cord, Cu, PUR AWG 26/7, 15.00 m, green, (similar to RAL 6018)

The Category 6A, S/FTP patch cables feature a PUR jacket that provides good resistance to oil, making them suitable for industrial use. Additional properties of the PUR jacket include UV resistance and self-extinguishing properties in the event of a fire. DIGITUS® Category 6A Class EA patch cables are manufactured and tested in accordance with the ISO/IEC 11801 and DIN EN 50173 CAT 6A standards. They ensure that the cable installation complies with the ISO & EN Channel specifications and deliver outstanding performance in DIGITUS® CAT 6A cabling. Performance has been tested up to 500 MHz, including performance characteristics such as near-end crosstalk (NEXT). They have been specifically designed to fully meet all requirements across various application areas. Each cable is equipped with an injection-molded kink-protection sleeve with strain relief. Additionally, the sleeve features a latch protection mechanism that prevents the cables from getting snagged and the latch from breaking off the connector.

Outstanding performance and connection quality for your network. Ideal for industrial applications.

- 2 RJ45 connectors (8P8C)
- Covers with kink protection, strain relief, and latch protection
- Length markings on the hoods
- Inner conductor: Copper (Cu)

Attributes

- Assortment: Twisted Pair Patch Cables
- Configuration: 1:1
- Packaging: DIGITUS Polybag
- Category: CAT 6A
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 15 m
- Color: green
- Jacket: PUR
- Slim Version: no
- Structure: 4 x 2 AWG 26/7, twisted pair
- Flat Version: no

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	25	13.20	46.00	33.00	28.00	42,504.00
Packaging Unit Inside	5	2.64	25.00	33.00	49.00	40,425.00
Packaging Unit Single	1	0.53	5.00	23.00	32.00	3,680.00
Net single without Packaging	1	0.47	1,500.00	1.20	1.30	0.00

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com