

# DIGITUS Mini HDMI Extender Set

DS-55203

EAN 4016032435006



## Mini HDMI Extender Set, Full HD, 1080p 50m, CAT 6/6A/7, powered via Micro USB cable, bk

The Mini HDMI Extender Set from DIGITUS extends the maximum length for HDMI cables to up to 50 m using only a simple network cable (Cat 6/6A) between the transmitter and receiver unit. A maximum video resolution of 1080p / 60Hz is supported. Power is supplied via the included micro USB cable, whereby only one unit needs to be supplied with power. Thanks to this feature and the ultra-compact design, the extender set can be positioned easily and discreetly almost anywhere. Place your screen wherever you like.

### Extends the maximum length for HDMI cables to up to 50 m using only a single network cable between a transmitter and a receiver unit

- Extends the maximum length for HDMI cables to up to 50 m using only a single network cable between a transmitter and a receiver unit
- Extends Full HD video content up to 50 m with a CAT 6/6A/7 cable
- Supports resolutions up to 1080p/60Hz
- Power supply via micro USB cable - Use the USB port of your PC/notebook, a USB charging adapter, etc. to supply the extender with power
- Supports PoE - Only one unit needs to be supplied with power via micro USB cable
- Ultra-compact design - can be easily and discreetly positioned almost anywhere

- Provides simple and fast distribution for HDMI video signals - place your screens wherever you want
- Supports HDCP 1.2
- Supports CAT 6, CAT 6A, CAT 7 network cables
- Complies with the IEEE-568B standard
- HDMI bandwidth: 10.2 Gps (max.)
- Housing: ABS plastic
- Working temperature: 0 ~ 50° C
- Ambient temperature: -10 ~ 70° C
- Humidity (no condensation): 0 ~ 90%
- Compression: Uncompressed
- Dimensions (1 unit): L 7.1 x W 2.6 x H 1.1 cm
- Weight (1 unit): 10 g
- Color: Black

### Attributes

- HDTV Resolution max.: 1920 x 1080 Pixel, 60Hz
- HDTV Standard: Full HD
- Category: CAT 6
- Distance: 50 m
- KVM: no
- PoE (Power over Ethernet): yes


### Package contents

- 1x Mini HDMI extender transmitter unit
- 1x Mini HDMI Extender receiver unit
- 2x Micro USB cable (1.0 m)
- Operating instructions

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	60	9.60	43.00	33.00	38.00	53,922.00
Packaging Unit Inside	1	0.16	11.40	7.80	5.80	515.74
Packaging Unit Single	1	0.16	11.40	7.80	5.80	515.74
Net single without Packaging	1	0.02	7.20	2.60	1.20	0.00

## More images:

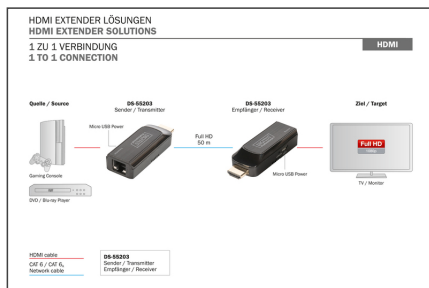

## Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)