

# DIGITUS® Mini HDMI

DS-55203

EAN 4016032435006



## Mini HDMI Extender Set, Full HD, 1080p 50m, Cat6/6A/7, powered via Micro USB cable, bk

Digitus Mini HDMI Extender Set, Full HD, 1080p 50m, Cat6/6A/7, powered via Micro USB cable, bk. This set includes a transmitter and a receiver, both in black. The transmitter has a Mini HDMI port on the front and a Micro USB port on the side. The receiver has a Mini HDMI port on the front and an Ethernet port on the side. Both devices are powered via the Micro USB port.

- Full HD (1920 x 1080 Pixel) resolution, 60Hz
- Category: CAT 6, CAT 6A, CAT 7
- Distance: 50m
- PoE (Power over Ethernet): yes
- HDCP 1.2
- IEEE-568B
- HDMI: 10,2 mm/0.4 (0.15)
- ABS
- 0 ~ 50° C

- Operating temperature: -10 ~ 70° C
- Storage temperature (non-operating): 0 ~ 90° C

Dimensions: 71 x 26 x 11 mm. Weight: 10 g. Material: ABS. Color: Black. Power supply: Micro USB. Power consumption: 0.5 W. Power over Ethernet: Yes. HDCP: 1.2. Cat: 6/6A/7. Distance: 50m. Resolution: 1920 x 1080 Pixel, 60Hz. KVM: no. PoE: yes.

### Attributes


- Full HD (1920 x 1080 Pixel) resolution, 60Hz
- Category: CAT 6, CAT 6A, CAT 7
- Distance: 50m
- PoE (Power over Ethernet): yes

### Package contents

- 1 Mini HDMI Transmitter
- 1 Mini HDMI Receiver
- 2 Micro USB cables (1,0 m)
- User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	9.60	43.00	33.00	38.00	53,922.00
Packaging Unit Inside	1	0.16	11.40	7.80	5.80	515.74
Packaging Unit Single	1	0.16	11.40	7.80	5.80	515.74
Net single without Packaging	1	0.02	7.20	2.60	1.20	0.00

**More images:**

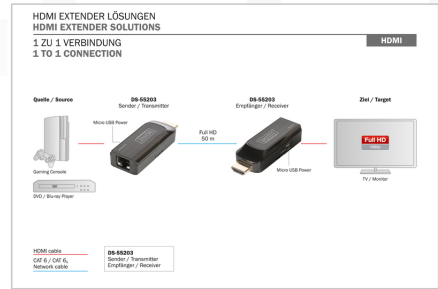

**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)