

DIGITUS® Cat.6A U/FTP installation cable, 500 m, simplex, Cca

DK-1625-A-VH-5
EAN 4016032435877



CAT 6A U-FTP installation cable, 500 MHz Cca (EN 50575), AWG 23/1, 500 m drum, sx, blue

The Digitus® Cat.6A U/FTP installation cable is characterized by the following cable construction 4x2x AWG23/1 and reaches a transmission frequency up to 500 MHz. The halogen free cable jacket is conform to the standard IEC 60332-1, FRNC-B, LSZH-1 and CPR Euro class Cca. The cable is suitable for building structured cabling in the secondary and tertiary area. Compliant with the following standards ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shielding: Aluminum foil, providing 100 % coverage
- Overall shielding: None, with drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C


- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Electrical properties:
- Impedance: 100±15 Ohm @ 4 - 100MHz; 100±25 Ohm @100-500 MHz
- Capacitance: 45 pF/m nominal @ 1KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 190 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6A
- Shielding: U-FTP, pairs in metal foil
- CPR: Cca
- Length: 500 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	28.00	40.00	30.00	30.00	36,000.00
Packaging Unit Inside	1	28.00	40.00	30.00	30.00	36,000.00
Packaging Unit Single	1	28.00	40.00	30.00	30.00	36,000.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

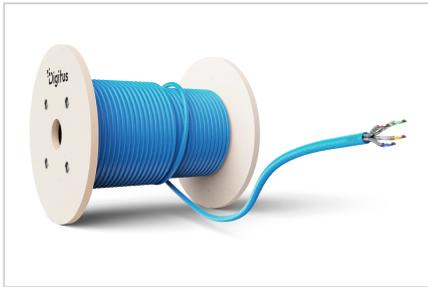


DIGITUS

CPR Symbol: B2ca, Cca, Dca, Eca

Brand: s1a, d1, a1

Technical specifications and safety information table.

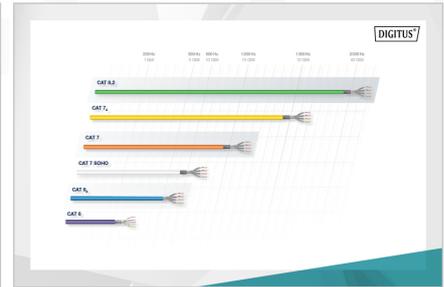

GHMT

Certificate No. 48884-21

Zertifikat Nr. 48884-21

Category 6e

Technical specifications and certification details.

Intertek

ETL Veritas Certificate of Conformance Number: 111422502CAT-6A1

Technical specifications and certification details.



DIGITUS

Leistungseigenschaften/Power Transmission Properties

PROB.	UTP	NEXT	PS NEXT	ALO	PS ALO	SL	EXTFEXT	PS EXFEXT
10	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
100	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
1000	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
10000	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

DIGITUS



Produktbeschreibung/Produkt Information	Physikalische Spezifikationen/Physical Properties
Produktname: CAT 6A U/FTP Installation Cable, 500m, Simplex, Eca	Standard: ISO/IEC 61905-2, EN 50384-2-10, EN 50384-2-11
Material: Polyethylene (PE), PVC, Copper, Aluminum	Conductor: 23 AWG, 19 strands
Shielding: Foil (Aluminum)	Dielectric: Polyethylene
Temperature range: -40°C to +75°C	Flammretardant: LSZH

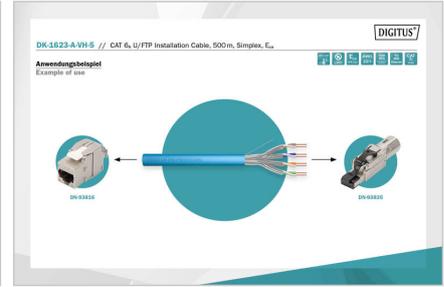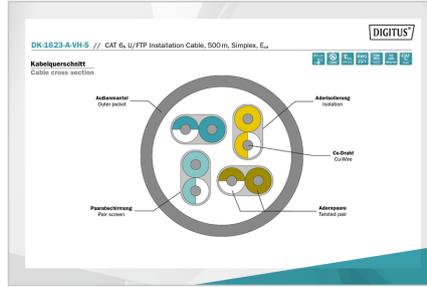

DIGITUS

AWG 23/1, 500 MHz, 10 Gbit Ethernet, CAT 6A, Eca, LSZH, CPR class

CAT 6A U/FTP Installation Cable, 500 m, Simplex, Eca

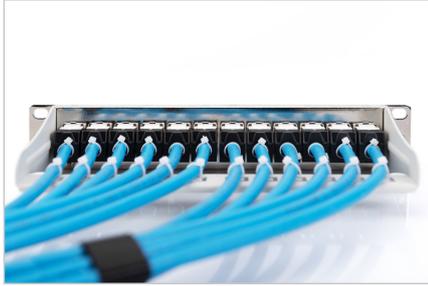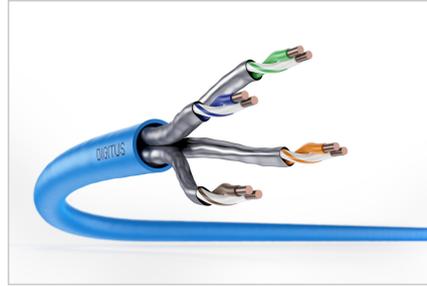

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com