


# DIGITUS® USB-C connection cable, USB-C - USB-B

AK-300149-018-S  
EAN 4016032437529

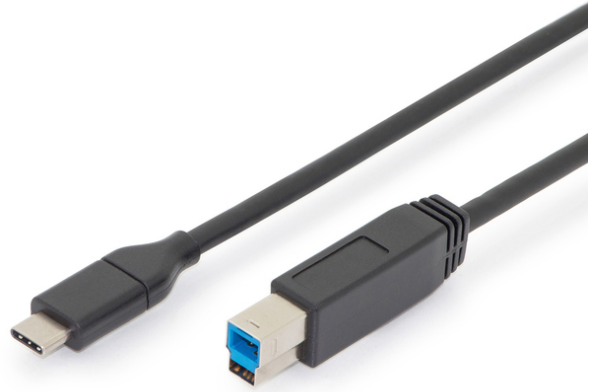

**USB Type-C connection cable, type C to B M/M, 1.8m, 3A, 5GB, 3.0 Version, bl**

For connecting external USB 3.0 end devices (with B socket, e.g. external hard disk enclosures, scanners or printers) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 5 Gbps (super speed).

**Type C plug can be used on both sides**

- SuperSpeed data transfers up to 5 Gbit/s - 10 times faster than USB 2.0
- Supports up to 3A power supply
- Supports the USB PD (Power Delivery) specification.
- Type C plug can be used on both sides

**Attributes**

- Ambalaža: Polybag
- Asortiman: USB kabeli
- AWG: 24/28
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB C, utikač
- Konektor 2: USB B, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Duljina: 1.8 m
- oklop: dvostruki oklop
- USB-C proizvodi: Da

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	10.20	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.85	35.00	28.00	7.00	6,860.00
Packaging Unit Single	1	0.09	13.00	24.00	4.50	1,404.00
Net single without Packaging	1	0.08	13.00	12.00	4.50	0.00

**More images:**



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)