


# DIGITUS® Cabo de ligação USB-C, USB-C - USB-B

AK-300149-018-S  
EAN 4016032437529

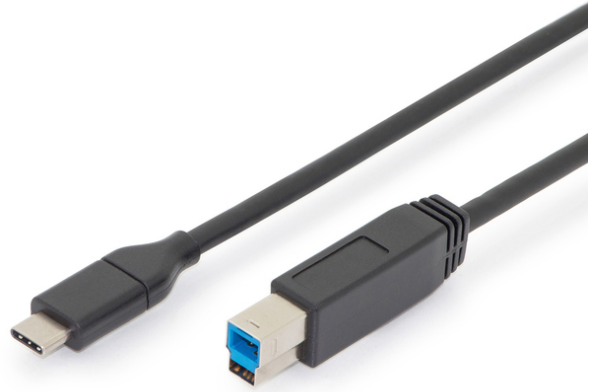

### Cabo de ligação USB tipo C, tipo C para B St/St, 1.8m, 3A, 5GB, versão 3.0, pb

Para ligar dispositivos finais externos USB 3.0 (com tomada B, por exemplo, caixas de discos rígidos externos, scanners ou impressoras) ao anfitrião USB (por exemplo, PC, computador portátil ou hub USB). Taxa de transferência até 5 Gbps (supervelocidade).

#### A ficha tipo C pode ser utilizada em ambos os lados

- Transferências de dados a alta velocidade até 5 Gbit/s - 10 vezes mais rápido do que o USB 2.0
- Suporta uma fonte de alimentação até 3A
- Suporta a especificação USB PD (Power Delivery).
- A ficha tipo C pode ser utilizada em ambos os lados

#### Attributes

- Assortment: USB Cables
- AWG: 24/28
- Color cable: black
- Color connector: black
- Connector 1: USB C, plug
- Connector 2: USB B, plug
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 1.8 m
- Shielding: Double shielding
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	10.20	50.00	32.00	21.00	33,600.00
Packaging Unit Inside	10	0.85	35.00	28.00	7.00	6,860.00
Packaging Unit Single	1	0.09	13.00	24.00	4.50	1,404.00
Net single without Packaging	1	0.08	13.00	12.00	4.50	0.00

**More images:**



**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)