


# DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-0025-R-10

EAN 4016032441359

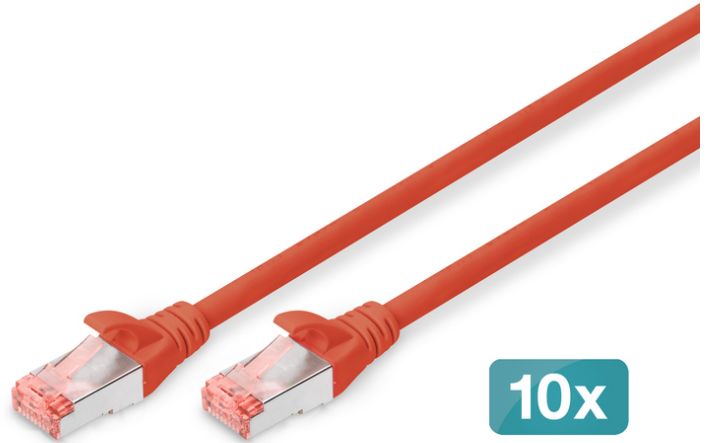

**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, 10 pieces, color red**

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, 10 pieces, color red. This is a 250 MHz, 568B RJ45 patch cord. It is made of copper (Cu) and is shielded with S-FTP (Shielded Twisted Pair). The cable is made of LSZH (Low Smoke Zero Halogen) material. The length is 0.25 m. The color is red. The connector is a modular RJ45 (8/8) plug. The package is Digitus polybag. The category is CAT 6. The shielding is S-FTP, pairs in metal foil and braid shielding. The length is 0.25 m. The color is red. The jacket is LSZH. The slim version is no. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no.


- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen)
- Shielded Twisted Pair (S-FTP)
- Conductor: Copper (Cu)

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Package: Digitus polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.25 m
- Color: red
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	25	4.90	36.00	36.00	24.00	31,104.00
Packaging Unit Inside	1	0.20	5.20	22.00	28.00	3,203.20
Packaging Unit Single	1	0.20	1.60	1.15	21.00	38.64
Net single without Packaging	1	0.02	25.00	1.20	1.30	0.00

**More images:**

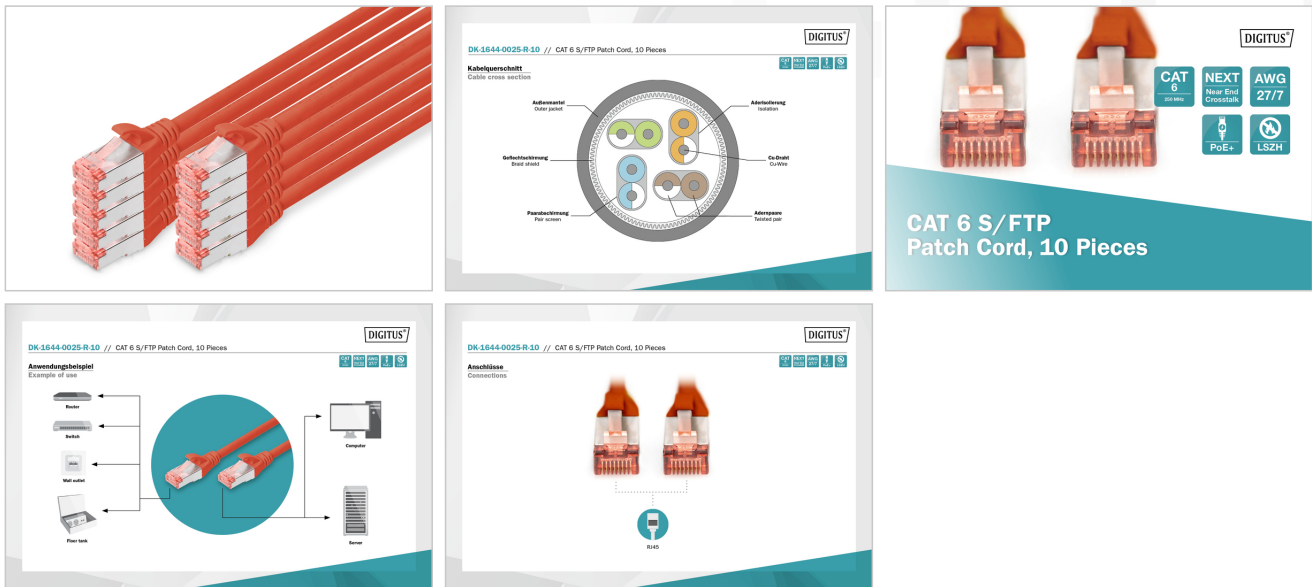

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)