

DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-020-10
EAN 4016032441458



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 2 m, 10 pieces, color grey

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 2 m, 10 pieces, color grey. This product is a high-quality network cable designed for reliable data transmission. It features a 250 MHz bandwidth and is compliant with ISO/IEC 11801 standards. The cable is constructed with 4 x 2 AWG 27/7 twisted pairs and includes S-FTP shielding for enhanced performance and reduced crosstalk. The connectors are modular RJ45 (8/8) plugs, ensuring easy installation and compatibility with standard network equipment. The cable is made of LSZH (Low Smoke Zero Halogen) material, making it safe for use in environments where fire safety is a concern. The length of the cable is 2 meters, and it is packaged in a carton containing 10 pieces.






- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, low smoke, zero halogen
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 2 m
- Color: grey
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	7.50	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	0.75	12.00	30.00	36.00	12,960.00
Packaging Unit Single	1	0.75	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.07	200.00	1.20	1.30	0.00

More images:

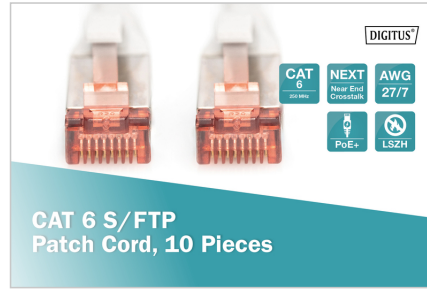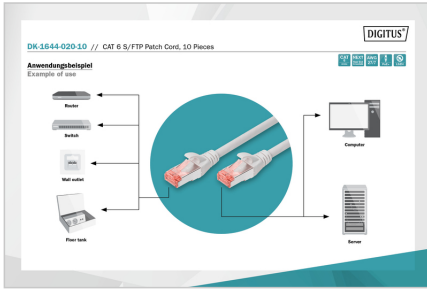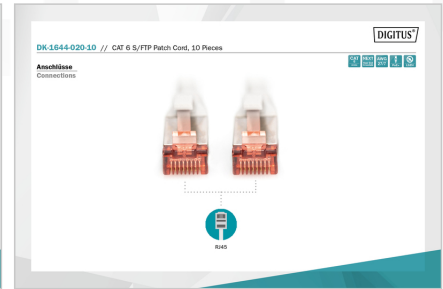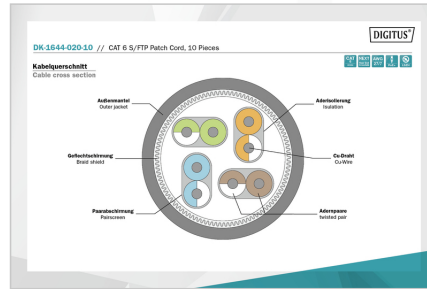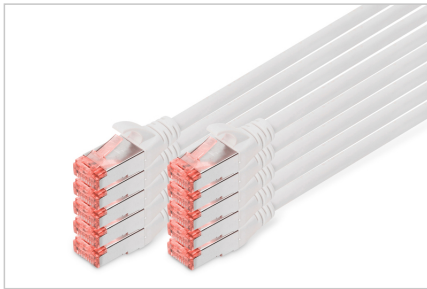

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.
 ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com