

# DIGITUS® CAT 6 S/FTP patch cable, 5 pieces

DK-1644-150-5

EAN 4016032441502



**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 15 m, 5 pieces, color grey**

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 15 m, 5 pieces, color grey. This patch cord is made of high-quality copper conductors and is shielded with a metal foil and braid. It is suitable for use in environments with high electromagnetic interference (EMI) and is compliant with the ISO/IEC 11801 standard. The patch cord is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments. The length of the patch cord is 15 meters. The patch cord is made of grey material. The patch cord is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments. The length of the patch cord is 15 meters. The patch cord is made of grey material.





- 2 RJ45 (8P8C)
- Patch cord is made of high-quality copper conductors and is shielded with a metal foil and braid.
- Patch cord is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments.
- Patch cord is made of grey material.

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 15 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	4	1.88	33.00	33.00	23.00	25,047.00
Packaging Unit Inside	1	0.47	15.00	32.00	47.00	22,560.00
Packaging Unit Single	1	0.47	3.00	23.00	34.00	2,346.00
Net single without Packaging	1	0.43	1,500.00	1.20	1.30	0.00

**More images:**

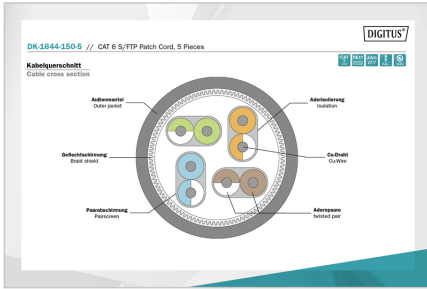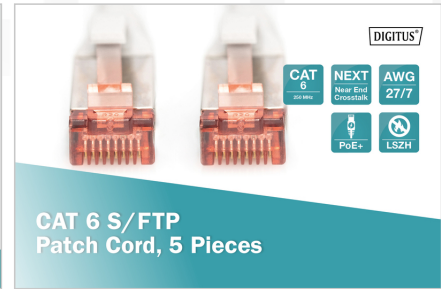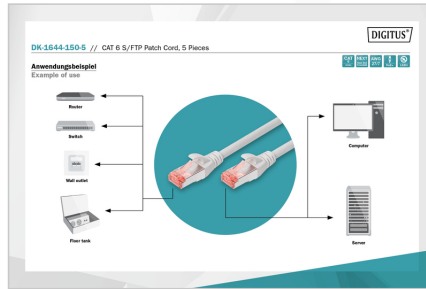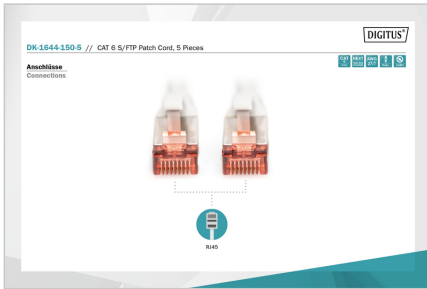

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)