

DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-010-BL-10
EAN 4016032441595



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color black

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color black. This product is a high-quality network cable designed for reliable data transmission. It features a shielded twisted pair (S/FTP) construction, which provides excellent protection against electromagnetic interference (EMI) and crosstalk. The cable is made of copper (Cu) conductors, ensuring low signal loss and consistent performance. The jacket is made of low smoke zero halogen (LSZH) material, making it safe for use in environments where fire safety is a concern. The length of the cable is 1 meter, and it is sold in a pack of 10 pieces. The connectors are modular RJ45 (8/8) plugs, which are standard for most network equipment. The cable is available in black and is suitable for use in a wide range of network applications, including data centers, offices, and homes.






- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, smoke free, halogen free
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: black
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	18	7.60	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	0.42	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.42	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

More images:

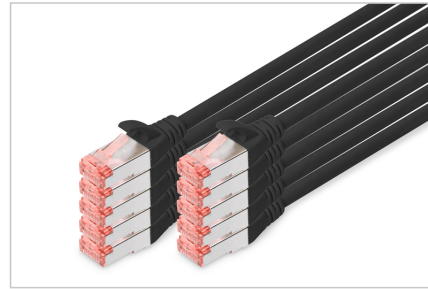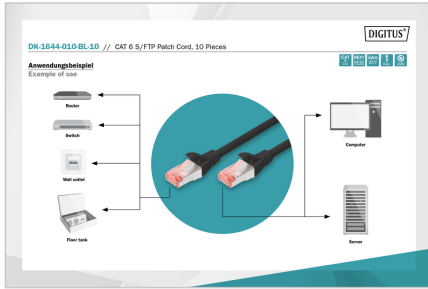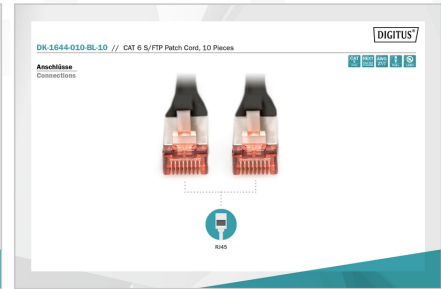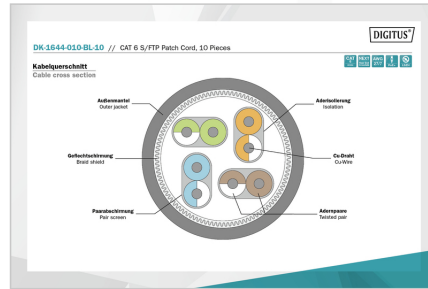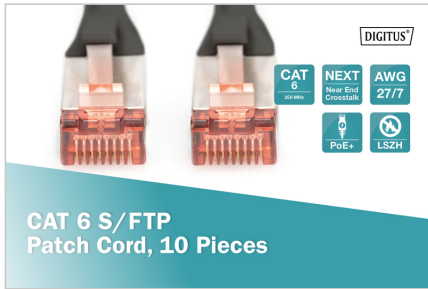

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com