


# DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-010-R-10  
EAN 4016032441618

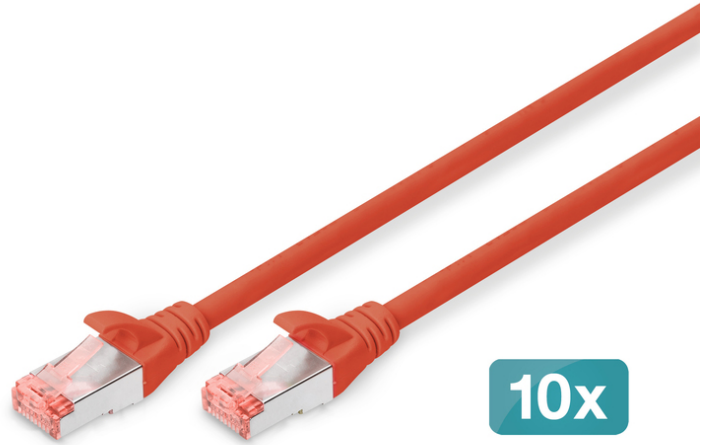

**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color red**

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color red. This product is a high-quality network cable designed for reliable data transmission. It features a shielded twisted pair (S/FTP) construction, which provides excellent performance and protection against electromagnetic interference (EMI). The cable is made of copper (Cu) and is suitable for use in environments where fire safety is a concern, thanks to its low smoke zero halogen (LSZH) jacket. The length of the cable is 1 meter, and it is sold in a pack of 10 pieces. The connectors are modular RJ45 (8/8) plugs, which are standard for most network equipment. The cable is also compatible with the ISO/IEC 11801 standard. The packaging is made of Digitus polypropylene (PP) and is designed to protect the cables during transport and storage. The cable is available in a variety of colors, including red, blue, and green. The cable is also available in different lengths, including 0.5 m, 1 m, 1.5 m, 2 m, 2.5 m, 3 m, 3.5 m, 4 m, 4.5 m, 5 m, 5.5 m, 6 m, 6.5 m, 7 m, 7.5 m, 8 m, 8.5 m, 9 m, 9.5 m, and 10 m. The cable is also available in different configurations, including 1:1, 2:1, and 4:1. The cable is also available in different versions, including slim and flat. The cable is also available in different structures, including twisted pair and shielded twisted pair. The cable is also available in different materials, including copper (Cu) and aluminum (Al). The cable is also available in different shielding options, including metal foil and braid shielding. The cable is also available in different connector types, including RJ45, BNC, and SFP. The cable is also available in different lengths, including 0.5 m, 1 m, 1.5 m, 2 m, 2.5 m, 3 m, 3.5 m, 4 m, 4.5 m, 5 m, 5.5 m, 6 m, 6.5 m, 7 m, 7.5 m, 8 m, 8.5 m, 9 m, 9.5 m, and 10 m. The cable is also available in different colors, including red, blue, and green. The cable is also available in different packaging options, including bulk and retail. The cable is also available in different regions, including Europe, North America, and Asia. The cable is also available in different languages, including English, German, and French. The cable is also available in different currencies, including Euro, US Dollar, and Japanese Yen. The cable is also available in different units of measurement, including meters, feet, and inches. The cable is also available in different formats, including PDF, HTML, and XML. The cable is also available in different versions, including 1.0, 1.1, and 1.2. The cable is also available in different configurations, including 1:1, 2:1, and 4:1. The cable is also available in different structures, including twisted pair and shielded twisted pair. The cable is also available in different materials, including copper (Cu) and aluminum (Al). The cable is also available in different shielding options, including metal foil and braid shielding. The cable is also available in different connector types, including RJ45, BNC, and SFP. The cable is also available in different lengths, including 0.5 m, 1 m, 1.5 m, 2 m, 2.5 m, 3 m, 3.5 m, 4 m, 4.5 m, 5 m, 5.5 m, 6 m, 6.5 m, 7 m, 7.5 m, 8 m, 8.5 m, 9 m, 9.5 m, and 10 m. The cable is also available in different colors, including red, blue, and green. The cable is also available in different packaging options, including bulk and retail. The cable is also available in different regions, including Europe, North America, and Asia. The cable is also available in different languages, including English, German, and French. The cable is also available in different currencies, including Euro, US Dollar, and Japanese Yen. The cable is also available in different units of measurement, including meters, feet, and inches. The cable is also available in different formats, including PDF, HTML, and XML. The cable is also available in different versions, including 1.0, 1.1, and 1.2.






- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, low smoke, zero halogen
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polypropylene (PP)
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: red
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	18	7.60	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	0.42	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.42	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

**More images:**

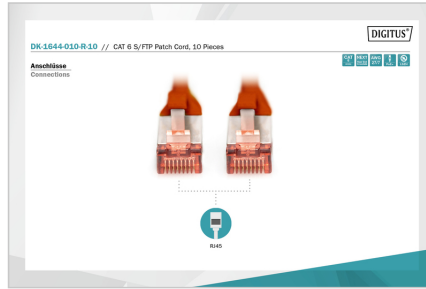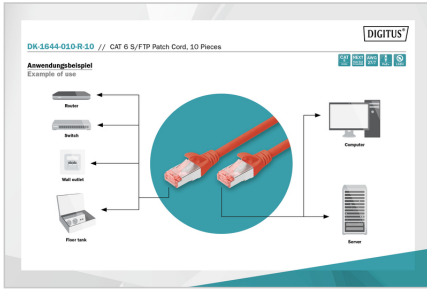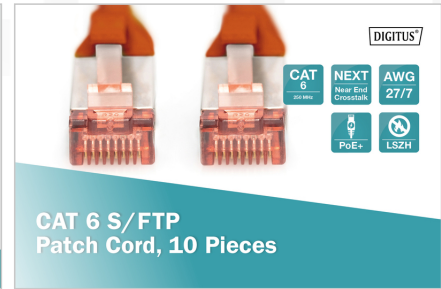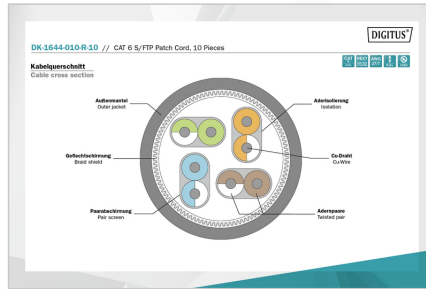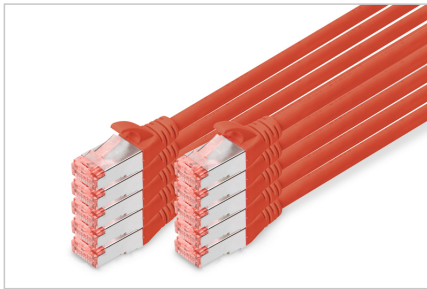

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)