

DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-010-WH-10

EAN 4016032441649



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color white

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color white. This is a 10-pack of CAT 6 S-FTP patch cords. The cables are 1 meter long and feature modular RJ45 (8/8) plugs on both ends. They are constructed with 4 x 2 AWG 27/7 twisted pairs and are shielded with S-FTP (pairs in metal foil and braid shielding). The cables are made of copper (Cu) and have a white LSZH jacket. The length is 1 m, and the color is white. The jacket is LSZH (Low Smoke Zero Halogen). The slim version is not applicable. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is not applicable. The configuration is 1:1. The connector 1 is a modular RJ45 (8/8) plug. The connector 2 is a modular RJ45 (8/8) plug. The packaging is polyethylene. The category is CAT 6. The shielding is S-FTP, pairs in metal foil and braid shielding. The length is 1 m. The color is white. The jacket is LSZH. The slim version is no. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no.





- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, low smoke, zero halogen
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Poly
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: white
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Attributes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	18	7.60	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	0.42	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.42	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

More images:

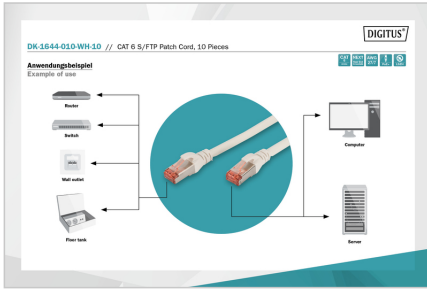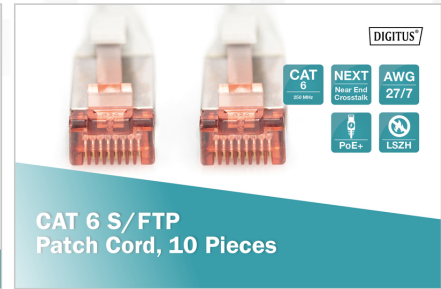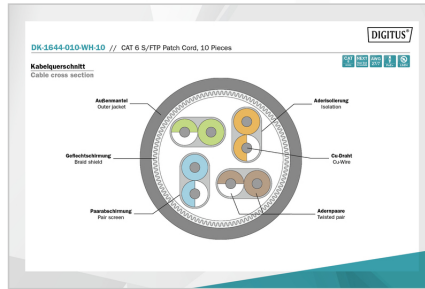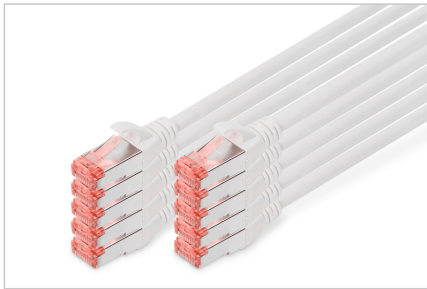

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com