


# DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-010-Y-10  
EAN 4016032441656

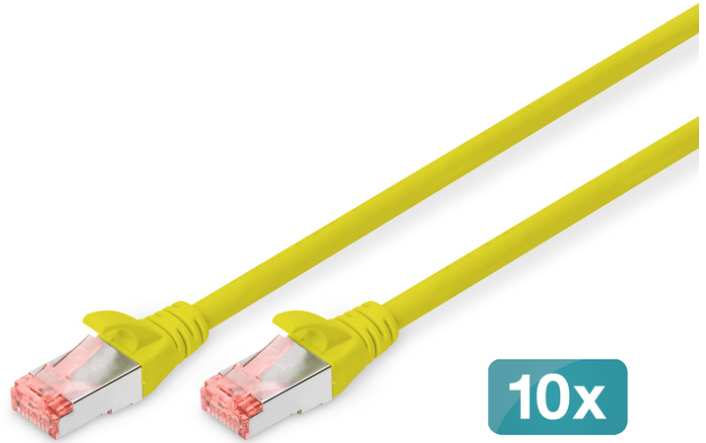

**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color yellow**

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, 10 pieces, color yellow. This product is a high-quality network cable designed for reliable data transmission. It features a 100 MHz bandwidth and is compliant with ISO/IEC 11801 and TIA/EIA 568-B standards. The cable is constructed with 4 x 2 AWG 27/7 twisted pairs, providing excellent performance and durability. The S-FTP shielding ensures minimal crosstalk and external interference, making it ideal for high-speed networking environments. The LSZH jacket is flame-retardant and low-smoke, ensuring safety in case of fire. The modular RJ45 (8/8) plug connectors are easy to install and provide a secure connection to network ports. The length of 1 meter is suitable for most patching applications in data centers, offices, and homes. The yellow color is a standard color for CAT 6 cables, making it easy to identify. The product is packaged in a carton containing 10 pieces, making it a convenient choice for bulk purchases. The overall design is sleek and professional, reflecting the high standards of Digitus networking equipment.






- 2 RJ45 (8P8C)
- LSZH jacket, flame-retardant and low-smoke
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Jacket material: LSZH (Cu)

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1m
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	18	7.60	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	0.42	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.42	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

**More images:**

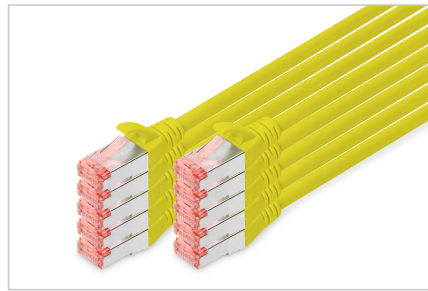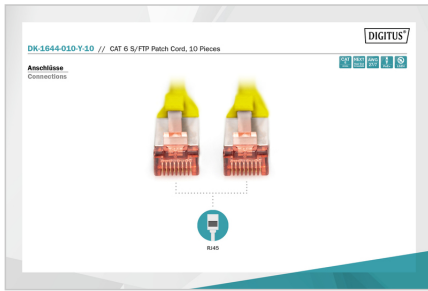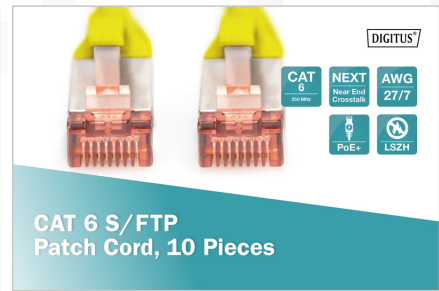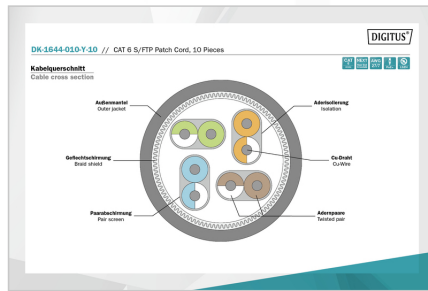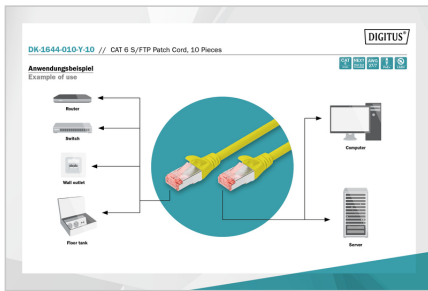

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)