DIGITUS® DIGITUS CAT 7 S-FTP □□□□□□□□□ □□□□□□ □□□□□ □□

DK-1744-VH-1

EAN 4016032441717

CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 100 m ring,

Подходит для создания структурированной проводки вот вторичной и третичной зонах

Отличная производительность и качество связи для Вашей сети

- Физическое описание
- Общее количество изолированных проводников : 8, свиты в 4 пары
- Цветовой код : сине -белый , оранжево -белый , зелено -белый , коричнево -белый
- Экранирование отдельных пар : алюминиевая фольга , 100% охват
- Цвет : оранжевый (RAL 2008)
- Механические свойства
- Растяжение : 150 Н макс .
- Среднее полное сопротивление : 100±5 Ом на 1 МГц - 600 МГц
- Сопр . по пост . току : 72 Ом/км макс . (2% макс . разбаланс сопротивлени
- Сопротивление петли по пост . току : 147 Ом/км макс . (2% макс . разбала

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 100 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	5.09	33.00	33.00	12.00	13,068.00
Packaging Unit Inside	1	5.09	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.09	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

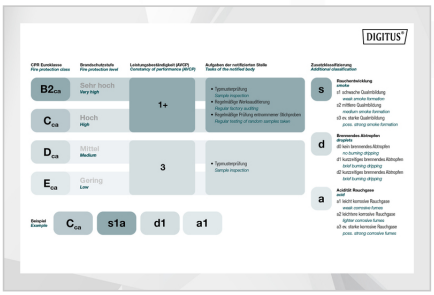

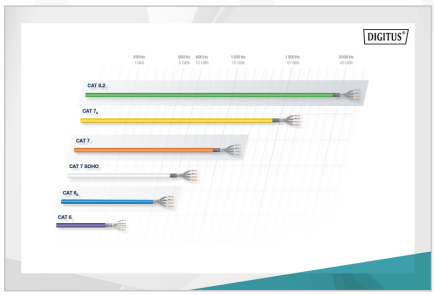

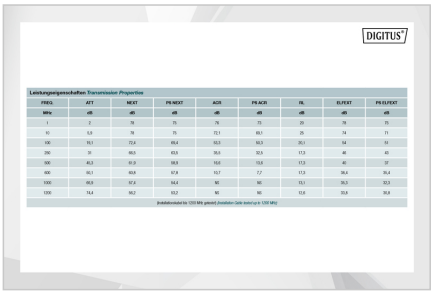

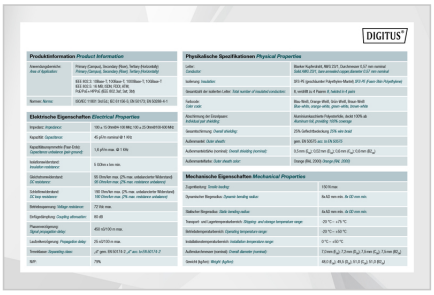

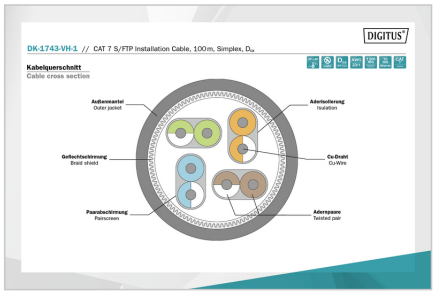

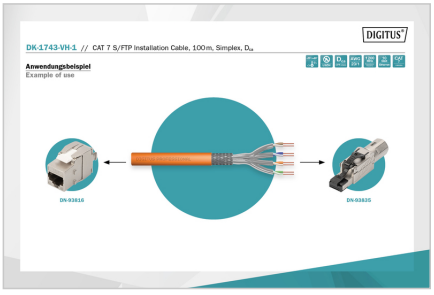

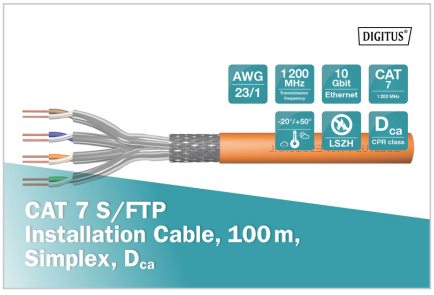

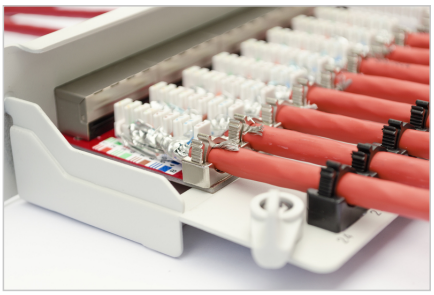

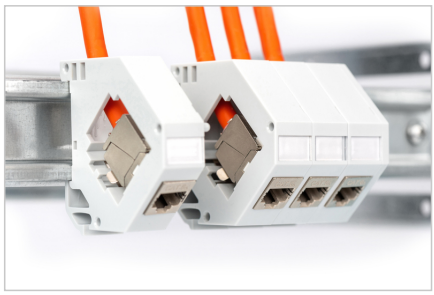

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com