


# DIGITUS® DIGITUS CAT 7 S-FTP

DK-1744-VH-D-1  
 EAN 4016032441748

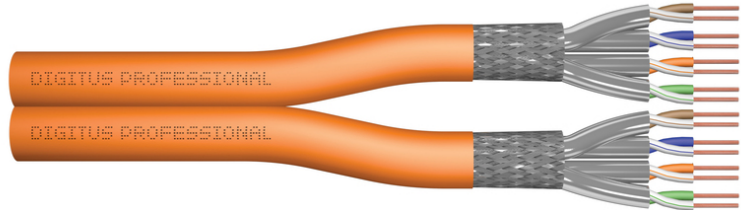

**CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 100 m ring,**

Digitus CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 100 m ring, is a high-speed network cable designed for Cat 7 applications. It features a 4-pair structure with solid twisted pairs and is shielded with a braided shield and foil shielding. The cable is orange and has a length of 100 meters.

- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 100 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

- Dimensions: 40 mm/ø outer dia. 100 m
- Weight: 10.18 kg/100 m (2% tolerance)
- Dimensions: 72 mm/ø outer dia. (2% tolerance)
- Weight: 147 g/100 m (2% tolerance)






**Attributes**

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- CPR: Cca
- Length: 100 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair


**Logistics**

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	10.18	38.00	38.00	14.00	20,216.00
Packaging Unit Inside	1	10.18	0.00	0.00	0.00	0.00
Packaging Unit Single	1	10.18	38.00	38.00	14.00	20,216.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

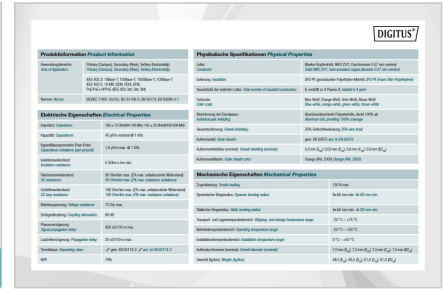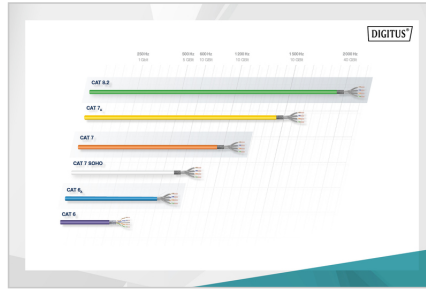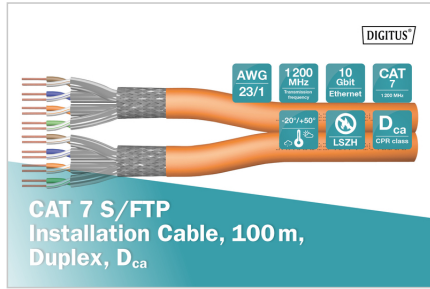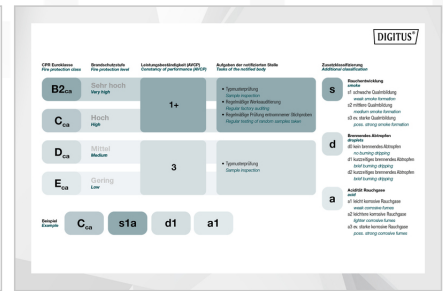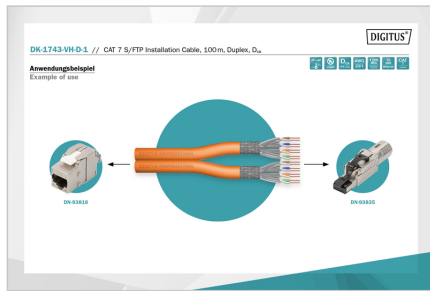

Leitungsparameter Transmission Properties									
PAIR	AWG	Ø	NEST	Ø	Ø	Ø	Ø	Ø	Ø
1	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
2	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
3	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
4	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
5	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
6	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
7	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
8	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
9	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
10	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
11	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
12	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
13	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
14	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
15	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
16	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
17	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
18	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
19	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
20	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
21	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
22	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
23	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
24	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
25	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
26	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
27	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
28	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
29	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
30	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
31	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
32	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
33	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
34	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
35	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
36	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
37	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
38	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
39	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
40	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
41	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
42	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
43	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
44	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
45	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
46	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
47	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
48	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
49	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
50	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
51	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
52	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
53	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
54	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
55	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
56	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
57	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
58	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
59	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
60	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
61	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
62	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
63	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
64	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
65	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
66	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
67	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
68	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
69	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
70	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
71	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
72	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
73	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
74	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
75	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
76	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
77	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
78	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
79	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
80	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
81	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
82	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
83	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
84	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
85	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
86	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
87	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
88	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
89	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
90	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
91	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
92	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
93	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
94	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
95	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
96	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
97	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
98	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
99	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76
100	2	0.76	0.76	0.76	0.76	0.76	0.76	0.76	0.76

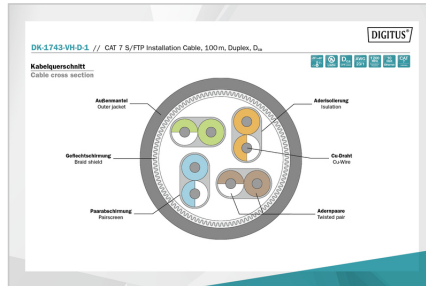

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.  
 ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
 info@assmann.com