


DIGITUS® DIGITUS CAT 7 S-FTP

DK-1744-VH-D-5
EAN 4016032441762

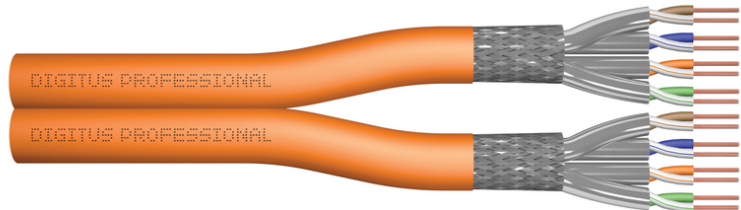

CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 500 m drum,

Digitus Professional CAT 7 S-FTP installation cable, 1200 MHz Cca (EN 50575), AWG 23/1, 500 m drum, is a high-speed network cable designed for CAT 7 applications. It features a 4-pair twisted pair structure with S-FTP shielding, providing excellent performance and reliability. The cable is orange in color and has a length of 500 meters. It is suitable for use in various network environments, including data centers and industrial settings.

- Cable length: 500 m
- Cable structure: 4 x 2 AWG 23/1
- Cable color: orange
- Cable jacket: LSOH
- Cable weight: 100±5 g/m
- Cable diameter: 10.5 mm
- Cable temperature range: -20°C to 60°C

- Cable length: 40 m/100 m, 1000 m
- Cable structure: 4 x 2 AWG 23/1, solid twisted pair
- Cable color: orange
- Cable jacket: LSOH
- Cable weight: 72 g/m/100 m, 7200 g/100 m (2% tolerance)
- Cable diameter: 10.5 mm
- Cable temperature range: -20°C to 60°C


Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 7
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 500 m
- Color: orange
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair




Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	54.70	55.00	55.00	38.00	114,950.00
Packaging Unit Inside	1	54.70	55.00	55.00	35.00	105,875.00
Packaging Unit Single	1	54.70	55.00	55.00	38.00	114,950.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:

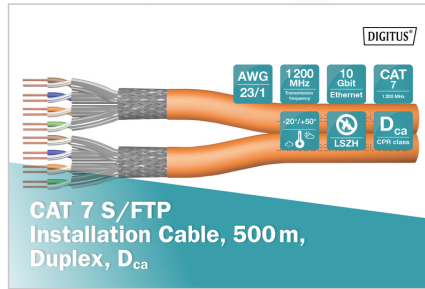

Leitungsgeometrische Transmissionsparameter											
AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG	AWG
1	2	3	4	5	6	7	8	9	10	11	12
16	17	18	19	20	21	22	23	24	25	26	27
28	29	30	31	32	33	34	35	36	37	38	39
40	41	42	43	44	45	46	47	48	49	50	51
52	53	54	55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72	73	74	75
76	77	78	79	80	81	82	83	84	85	86	87
88	89	90	91	92	93	94	95	96	97	98	99
100	101	102	103	104	105	106	107	108	109	110	111
112	113	114	115	116	117	118	119	120	121	122	123

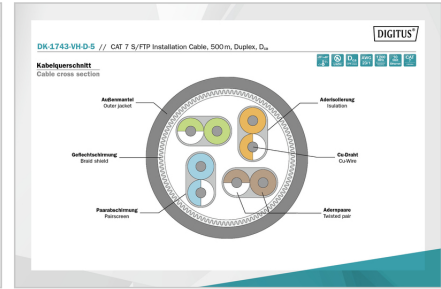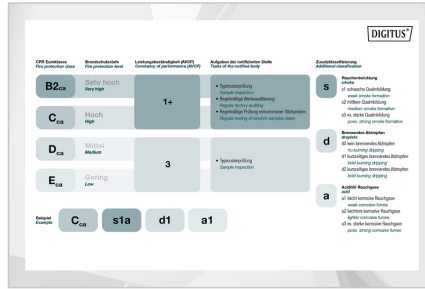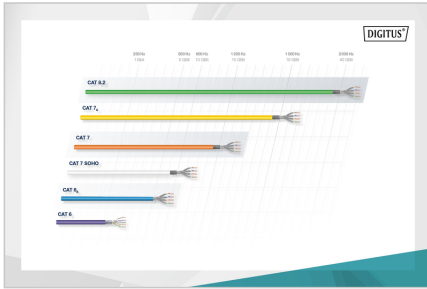

Produktkennzeichen / Product Information	Physische Spezifikationen / Physical Properties
Produktkennzeichen DK-1743-VH-D-5 // CAT 7 S/FTP Installation Cable, 500m, Duplex, Dca	Physische Spezifikationen AWG: 23/1 Leitungsgeometrie: 1200 MHz Leitungsgeometrie: 10 Gbit Ethernet Leitungsgeometrie: CAT 7 1000 Mbps Leitungsgeometrie: LSZH Leitungsgeometrie: Dca GPR class
Technische Eigenschaften Leitungsgeometrie: 1200 MHz Leitungsgeometrie: 10 Gbit Ethernet Leitungsgeometrie: CAT 7 1000 Mbps Leitungsgeometrie: LSZH Leitungsgeometrie: Dca GPR class	Mechanische Eigenschaften Leitungsgeometrie: 1200 MHz Leitungsgeometrie: 10 Gbit Ethernet Leitungsgeometrie: CAT 7 1000 Mbps Leitungsgeometrie: LSZH Leitungsgeometrie: Dca GPR class

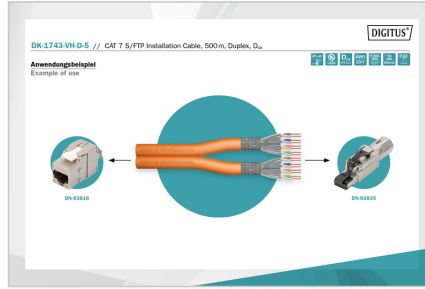

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
 info@assmann.com