DIGITUS® Instalacijski kabel Kat.6A U/FTP, 500 m, simplex, B2ca

DK-1626-A-VH-5

EAN 4016032441847



CAT 6A U-FTP installation cable, 500 MHz B2ca (EN 50575), AWG 23/1, 500 m drum,

Digitus® instalacijski kabel Kat.6A U/FTP proizveden je kao 4x2xAWG23/1 i za brzine prijenosa do 500 MHz. Vanjski plašt bez halogena sukladan je standardima IEC 60332-1, FRNC-B, LSZH-1 i CPR Euro klase B2ca. Kabel je prikladan za sustave strukturnog kabliranja u sekundarnim i tercijarnim sektorima. Sukladan je slijedećim standardima ISO/IEC 11801, DIN EN 50173, DIN EN 50288-10-1.

Vrhunsku kvalitetu Vaše mreže osigurava oprema izrađena po standardima orijentiranim budućim zahtjevima.

- Fizička svojstva:
- Vodič: Neizolirani bakar bez olova, kruti AWG 23/1
- Ukupan broj izoliranih vodiča: 8, 4 parice
- Kod u boji: Plavo-bijela, narančasto-bijela, zeleno-bijela, smeđe-bijela
- Pojedinačna zaštita parice: Aluminijska folija, 100 % oplet
- Zaštita cijelog kabela: Ne postoji, sa žicom
- Vanjski plašt: Eca na B2ca sukl. EN 50575; LSZH
- Boja vanjskog plašta: Svjetlo plava (RAL 5012)
- Mehaničke karakteristike:
- Vučno opterećenje: 150 N maks.
- Dinamički radijus savijanja: 8x AD mm min.
- Statički radijus savijanja: 4x AD mm min.
- Raspon temperatura za prijevoz i skladištenje: -20 °C do +60 °C
- Raspon radne temperature: -20 °C do +75 °C
- Temperaturni raspon instalacije: 0°C do +50°C
- Vanjski promjer Simplex (nominalni): 7,0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Težina (kg/km): 56 kg (Eca); 57 kg (Dca); 58 kg (Cca); 58 kg (B2ca)
- Električne karakteristike:
- Impedancija: 100±15 Ω @ 4 - 100MHz; 100±25 Ω @100-500 MHz
- Kapacitet: 45 pF/m nominalni @ 1 KHz
- Nebalansirani kapacitet (parica-uzemljenje): 1,6 pF/m maks @ 1 KHz
- Otpor izolacije: 5 GΩ x km min.
- Otpor DC petlje: 190 Ω/km maks. (2% maks. nebalansirani otpor)
- Napon: 72 Vdc maks.
- Prigušenje spoja: CA-tip 2
- Kašnjenje: 450 nS/100 m maks.
- Kašnjenje signala: 15 nS/100 m maks.
- Klasa odvajanja: “c” sukl. EN 50174-2
- NVP: 70%

Attributes


- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6A
- Oklop: U-FTP, parovi u metalnoj foliji
- CPR: B2ca
- Duljina: 500 m
- Boja: svijetlo plavi
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	28.00	40.00	30.00	30.00	36,000.00
Packaging Unit Inside	1	28.00	40.00	30.00	30.00	36,000.00
Packaging Unit Single	1	28.00	40.00	30.00	30.00	36,000.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.


More images:

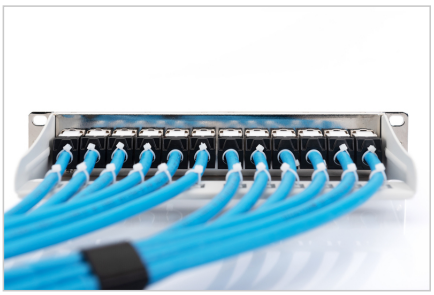





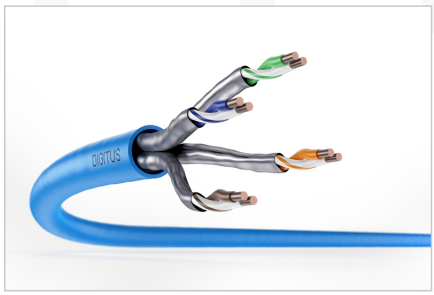


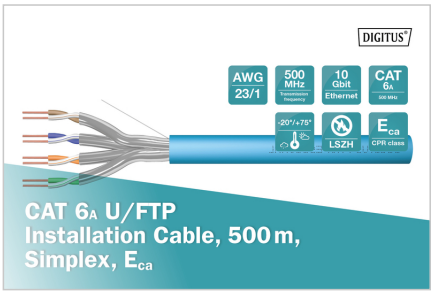

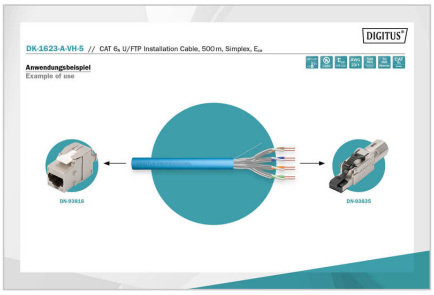

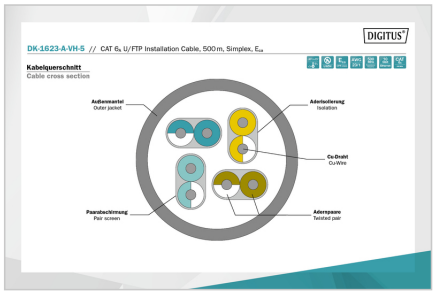


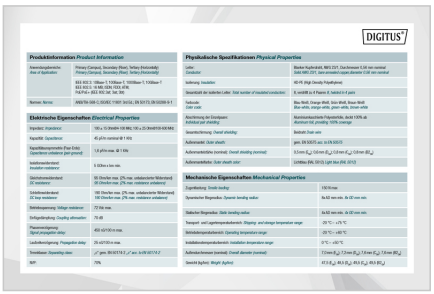


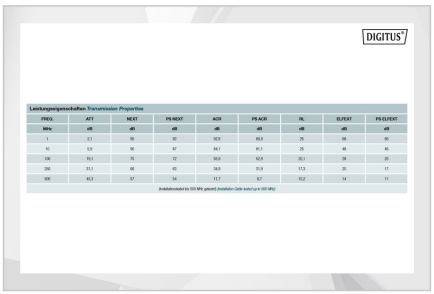






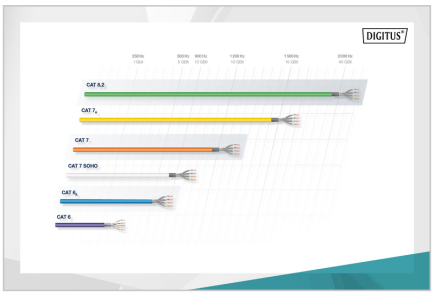

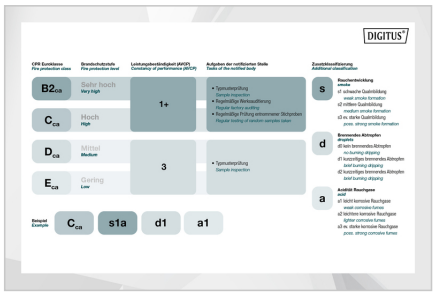

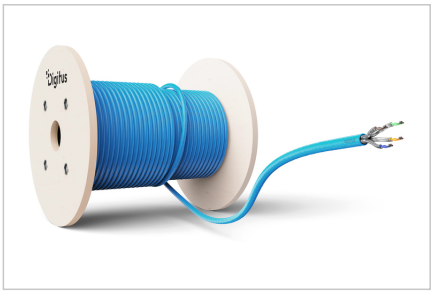

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com