

Digitus® CAT 6A U/UTP installation cable, 100 m, simplex, Cca

DK-1615-A-VH-1

EAN 4016032441892



CAT 6A U-UTP installation cable, 500 MHz Cca (EN 50575), AWG 23/1, 100 m paper box,

DIGITUS® Category 6A U-UTP installation cables are manufactured and tested to the ISO/IEC 11801, TIA/-586-C.2 and EN 50173 Category 6A specifications. Every cord consists of 8 color coded AWG 23 polyethylene insulated con-ductors. The conductors are twisted together to form 4 pairs with varying lay lengths. Printing details along the outer sheath includes the brand name and item code. The cable is packed in a paper pullout box which makes the installation easy.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, olid AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer sheath: Dca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0,5 mm (Eca); 0,6 mm (Dca); 1,2 mm (Cca); 1,4 mm (B2ca)
- Outer sheath color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C

- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7,1 mm (Eca); 7,3 mm (Dca); 7,4 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 53 kg (Eca); 54 kg (Dca); 55 kg (Cca); 56 kg (B2ca)
- Electrical properties:
- Impedance: 100±5Ohm @ 1 - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: CA-Type 2
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 10 nS/100 m max.
- Separating class: "c" acc. to EN 50174-2
- NVP: 70%

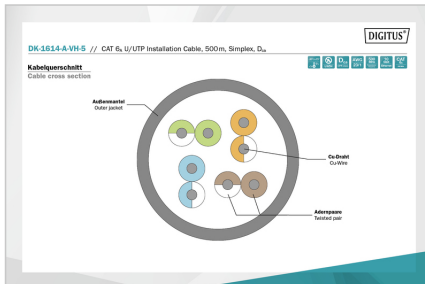
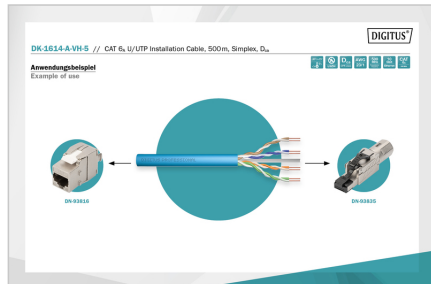
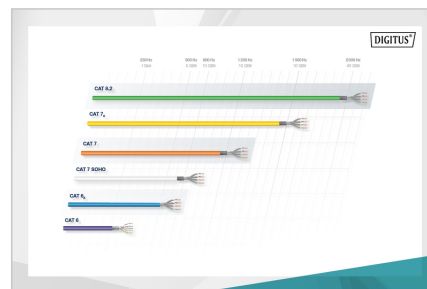
Attributes

- Category: CAT 6A
- Shielding: U-UTP, unshielded
- CPR: Cca
- Length: 100 m
- Color: light-blue
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	5.05	33.00	33.00	12.00	13,068.00
Packaging Unit Inside	1	5.05	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.05	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

A black patch panel with 16 ports, 8 on each side. Eight blue cables are plugged into the top ports, and the other eight ports are empty.

[illegible]

EPR Verfahren EPR Verfahren		Brandschutzklasse Die produktionsklasse	Unterstützungsfunktion (EPR) Unterstützungsfunktion (EPR)	Abgabe- und verbleibende Stoffe Abgabe- und verbleibende Stoffe	Brandverhalten Brandverhalten
B2+	Sehr hoch Very high	1+	• Tierschutzfunktion • Regenerationsfunktion • Abgabe- und verbleibende Stoffe	s	• Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe
C ₂	Hoch High		• Regenerationsfunktion • Abgabe- und verbleibende Stoffe	d	• Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe
D ₂	Mittel Medium	3	• Tierschutzfunktion • Abgabe- und verbleibende Stoffe	a	• Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe • Abgabe- und verbleibende Stoffe
E ₂	Gering Low				



2