

DIGITUS® CAT 6 F/UTP installation cable, 100 m, simplex, Dca

DK-1624-VH-1

EAN 4016032441984



CAT 6 F-UTP installation cable, 250 MHz Dca (EN 50575), AWG 23/1, 100 m paper box,

The Digitus Cat 6 F/UTP installation cable is designed for use in the structured data center and the building cabling according to ISO/IEC 11801, DIN EN 50288-5-1, DIN EN 50173, IEC 60332-1. The cable is perfectly suitable for the transmission of both analog and digital data and also supports POE and POE+.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare annealed copper, solid AWG 23/1
- System/s of AVCP: AVCP 3
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: Aluminum foil, providing 100% coverage, drain wire
- Outer sheath: Eca to B2ca acc. to EN 50575; LSZH
- Outer sheath diameter (nominal): 0.5 mm (Eca); 0,6 mm (Dca); 0,8 mm (Cca); 0,08 mm (B2ca)
- Outer sheath color: Purple
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C


- Installation temperature range: 0 °C up to +50 °C
- Overall diameter Simplex (nominal): 7.0 (Eca); 7,2 mm (Dca); 7,6 mm (Cca); 7,6 mm (B2ca)
- Weight (kg/km): 46 kg (Eca); 47 kg (Dca); 48,5 kg (Cca); 48,5 kg (B2ca)
- Electrical properties:
- Impedance: 100±5 Ohm @ 1-250 MHz
- Capacitance: 45 pF/m nominal @ 800 Hz
- Capacitance unbalance (pair-ground): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 40 dB
- Signal propagation delay: 535 nS/100 m max.
- Propagation delay: 20 nS/100 m max.
- Separating class: „c” acc. to EN 50174-2
- NVP: 69%

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Dca
- Length: 100 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	5.14	33.00	33.00	12.00	13,068.00
Packaging Unit Inside	1	5.14	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.14	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

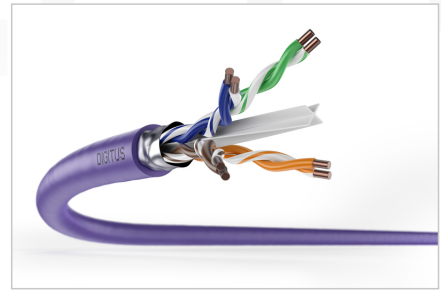

DIGITUS

AWG 23/1 | 250 MHz | 1 Gbit Ethernet | CAT 6 | 100 m | LSZH | Eca | CPN class

CAT 6 F/UTP Installation Cable, 100 m, Simplex, Eca

DIGITUS

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, Eca

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, Eca

Kabelquerschnitt
Cable cross section

DIGITUS

Produktinformationen / Product Information	Physikalische Spezifikationen / Physical Properties
Bestandteile / Components Produktbeschreibung: Patchkabel, Simplex, 100 m, Cat. 6 F/UTP Artikelnummer: DK-1623-VH-1 EAN: 4011511 16231	Material Kabelmaterial: Polyethylen (PE) / Jacket: Polyethylen (PE)
Technische Eigenschaften / Technical Properties Kategorie: CAT 6 F/UTP Kategorie: CAT 6 F/UTP Kategorie: CAT 6 F/UTP	Leistungseigenschaften / Performance Characteristics Übertragungsfrequenz: 250 MHz Übertragungsgeschwindigkeit: 1 Gbit/s Kabeltyp: Simplex

DIGITUS

Leistungsmerkmale / Performance Characteristics

10BASE-T	100BASE-TX	1000BASE-T	1000BASE-TX	10GBASE-T
1	20	30	30	30
2	20	30	30	30
3	20	30	30	30
4	20	30	30	30
5	20	30	30	30
6	20	30	30	30
7	20	30	30	30
8	20	30	30	30
9	20	30	30	30
10	20	30	30	30


Intertek

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

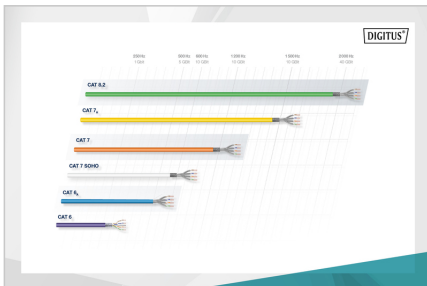

DIGITUS

CEP-Bestimmungen / CEP Requirements

CEP-Bestimmung / CEP Requirement	Druckverteilung / Pressure Distribution	Leistungseigenschaften / Performance Characteristics	Anforderungen an verflochtene Leiter / Requirements for Twisted Pairs	Zusammenfassung / Summary
B2 _{ca}	Schleifhöhe / Loop Height	1+	• Typischer Wert / Typical Value • Kapazität / Capacity • Kapazität / Capacity	s
C _{ca}	Messung / Measurement	3	• Typischer Wert / Typical Value • Kapazität / Capacity	d
D _{ca}	Messung / Measurement	3	• Typischer Wert / Typical Value • Kapazität / Capacity	a
E _{ca}	Leistung / Power	3	• Typischer Wert / Typical Value • Kapazität / Capacity	a



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com