


More images:

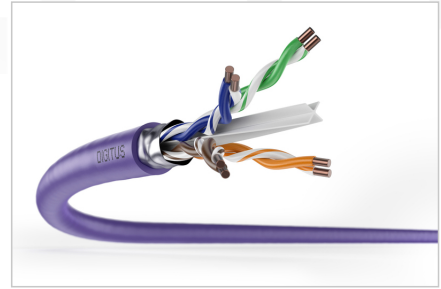

DIGITUS

AWG 23/1
250 MHz
1 Gbit Ethernet
CAT 6
20°/75°
LSZH
E_{ca} CPN class

CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

DIGITUS

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

Anwendungsbeispiel
Example of use

DIGITUS

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

Kabelquerschnitt
Cable cross section

DIGITUS

Produktdaten / Product Information	Physikalische Spezifikationen / Physical Properties
Bestandteile / Components: 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E _{ca} 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E _{ca} 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E _{ca} 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E _{ca}	Material: Polyethylene (PE) Color: Purple Length: 100m Conductor: 23 AWG Insulation: 1.0mm Shielding: None Temperature Range: -40°C to +75°C Flammretardant: LSZH CPN Class: E _{ca}

DIGITUS

Leistungsmerkmale / Transmission Properties

100m	150m	200m	250m	300m	350m	400m	450m	500m
1	2	3	4	5	6	7	8	9


Intertek

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

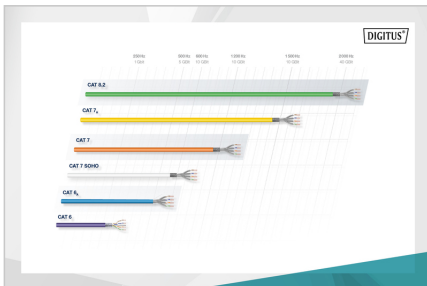

DIGITUS

CEP-Bestimmungen / CEP Requirements

Druckverhältnisse / Pressure Conditions

Laufgeschwindigkeit / Speed

1+

3

C_{ca} s1a d1 a1



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com