


DIGITUS® DIGITUS® CAT 6 F-UTP F-UTP

DK-1625-VH-305
EAN 4016032442028

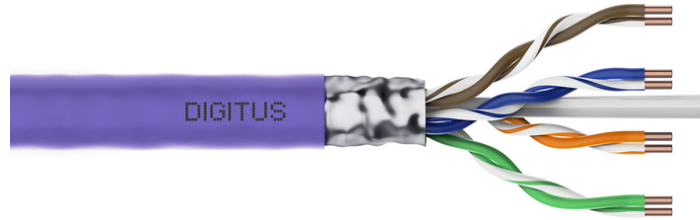

CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum,

DIGITUS® CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables

- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables
- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables
- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables
- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables
- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables
- CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum, 4 twisted pairs of conductors, foil shielding, ISO/IEC 11801 Class E, Assortment: Twisted Pair Installation Cables

- Length: 305 m
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Cca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	18.39	37.00	37.00	31.00	42,439.00
Packaging Unit Inside	1	18.39	0.00	0.00	0.00	0.00
Packaging Unit Single	1	18.39	37.00	37.00	31.00	42,439.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

