
DIGITUS® DIGITUS® CAT 6 ▯▯▯▯▯▯▯ F-UTP ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯

DK-1625-VH-305

EAN 4016032442028

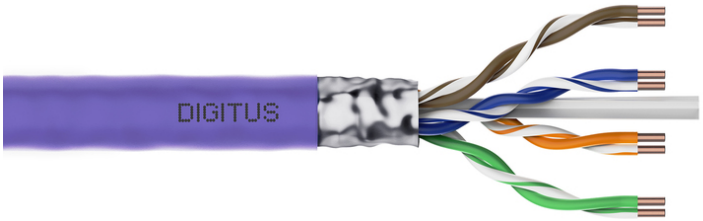

CAT 6 F-UTP installation cable, 250 MHz Cca (EN 50575), AWG 23/1, 305 m drum,

DIGITUS® ▯▯▯▯▯▯▯▯▯▯ 6 F-UTP ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯ ▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯ ISO/IEC 1180 AWG 23. ▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯ ▯ 4 ▯▯▯▯▯▯ ▯▯▯▯▯ ▯ ▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯, ▯▯ ▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯

▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯ ▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯ ▯▯▯▯ ▯▯▯▯▯▯ ▯▯▯▯▯.

- ▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯
- ▯▯▯▯▯▯▯▯▯▯: ▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯
- ▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯: 8, ▯▯▯▯▯▯ ▯ 4 ▯▯▯▯▯
- ▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯: ▯▯▯▯▯-▯▯▯▯▯▯, ▯▯▯▯▯▯▯▯▯▯-▯▯▯▯▯▯, ▯▯▯▯▯▯▯▯-▯▯▯▯▯▯, ▯▯▯▯▯▯▯▯▯▯▯-▯▯▯▯▯▯
- ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯: ▯▯▯▯▯▯▯▯▯▯▯▯▯▯
- ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯

- ▯▯▯▯▯▯▯▯▯▯▯▯: 150 ▯ ▯▯▯▯▯.
- ▯▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯ ▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯▯: 100±5 ▯▯ ▯▯ 1 ▯▯▯▯ - 600 ▯▯▯▯

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: Cca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair


Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	18.39	37.00	37.00	31.00	42,439.00
Packaging Unit Inside	1	18.39	0.00	0.00	0.00	0.00
Packaging Unit Single	1	18.39	37.00	37.00	31.00	42,439.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:







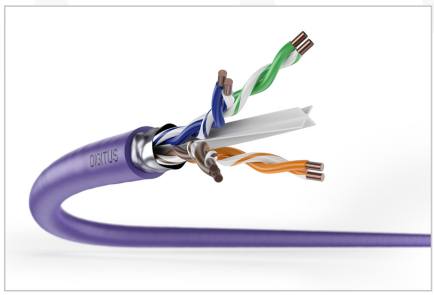


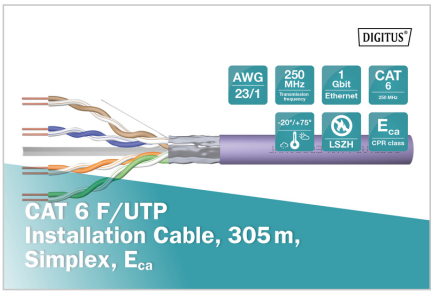

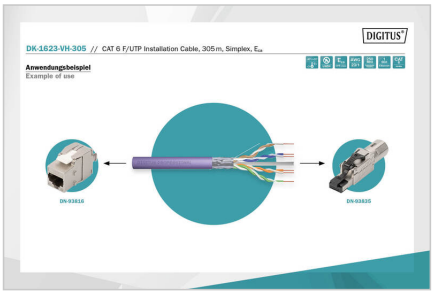


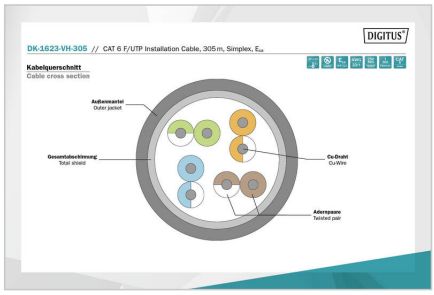


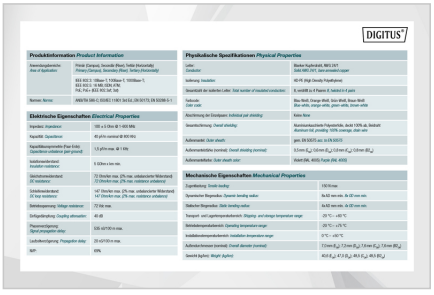

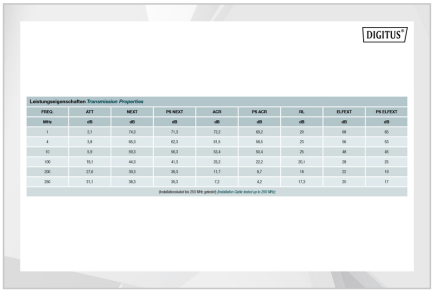



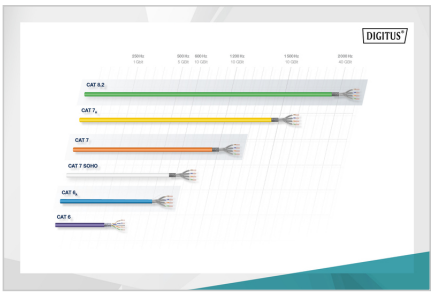

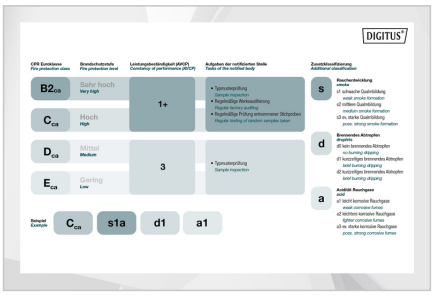

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com