


DIGITUS® DIGITUS® CAT 6 F-UTP F-UTP

DK-1626-VH-1
EAN 4016032442042

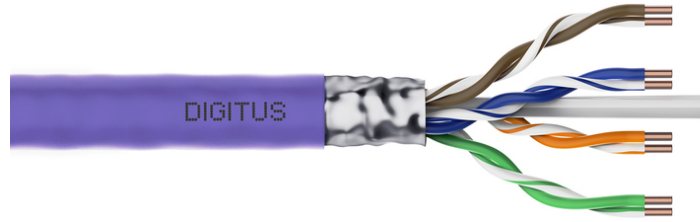


CAT 6 F-UTP installation cable, 250 MHz B2ca (EN 50575), AWG 23/1, 100 m paper box,

- 100 m length
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: B2ca
- Length: 100 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	5.61	33.00	33.00	12.00	13,068.00
Packaging Unit Inside	1	5.61	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.61	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

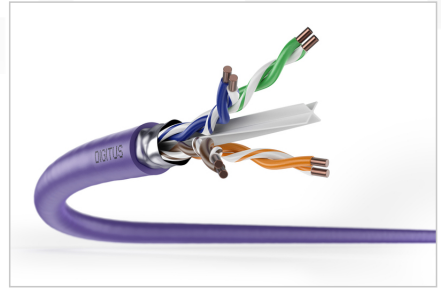

CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

Anwendungsbeispiel
Example of use

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E_{ca}

Kabelquerschnitt
Cable cross section

Produktdaten / Product Information	Physische Spezifikationen / Physical Properties
Produktbeschreibung: Patch Cable, Shielded, Simplex, Cat6, Ethernet, 100m, 23 AWG, LSZH, Simplex, Eca	Standard: EN 50173-1:2012, EN 50173-2:2012, EN 50173-3:2012, EN 50173-4:2012, EN 50173-5:2012, EN 50173-6:2012, EN 50173-7:2012, EN 50173-8:2012, EN 50173-9:2012, EN 50173-10:2012, EN 50173-11:2012, EN 50173-12:2012, EN 50173-13:2012, EN 50173-14:2012, EN 50173-15:2012, EN 50173-16:2012, EN 50173-17:2012, EN 50173-18:2012, EN 50173-19:2012, EN 50173-20:2012, EN 50173-21:2012, EN 50173-22:2012, EN 50173-23:2012, EN 50173-24:2012, EN 50173-25:2012, EN 50173-26:2012, EN 50173-27:2012, EN 50173-28:2012, EN 50173-29:2012, EN 50173-30:2012, EN 50173-31:2012, EN 50173-32:2012, EN 50173-33:2012, EN 50173-34:2012, EN 50173-35:2012, EN 50173-36:2012, EN 50173-37:2012, EN 50173-38:2012, EN 50173-39:2012, EN 50173-40:2012, EN 50173-41:2012, EN 50173-42:2012, EN 50173-43:2012, EN 50173-44:2012, EN 50173-45:2012, EN 50173-46:2012, EN 50173-47:2012, EN 50173-48:2012, EN 50173-49:2012, EN 50173-50:2012, EN 50173-51:2012, EN 50173-52:2012, EN 50173-53:2012, EN 50173-54:2012, EN 50173-55:2012, EN 50173-56:2012, EN 50173-57:2012, EN 50173-58:2012, EN 50173-59:2012, EN 50173-60:2012, EN 50173-61:2012, EN 50173-62:2012, EN 50173-63:2012, EN 50173-64:2012, EN 50173-65:2012, EN 50173-66:2012, EN 50173-67:2012, EN 50173-68:2012, EN 50173-69:2012, EN 50173-70:2012, EN 50173-71:2012, EN 50173-72:2012, EN 50173-73:2012, EN 50173-74:2012, EN 50173-75:2012, EN 50173-76:2012, EN 50173-77:2012, EN 50173-78:2012, EN 50173-79:2012, EN 50173-80:2012, EN 50173-81:2012, EN 50173-82:2012, EN 50173-83:2012, EN 50173-84:2012, EN 50173-85:2012, EN 50173-86:2012, EN 50173-87:2012, EN 50173-88:2012, EN 50173-89:2012, EN 50173-90:2012, EN 50173-91:2012, EN 50173-92:2012, EN 50173-93:2012, EN 50173-94:2012, EN 50173-95:2012, EN 50173-96:2012, EN 50173-97:2012, EN 50173-98:2012, EN 50173-99:2012, EN 50173-100:2012
Technische Spezifikationen: 100m, 23 AWG, LSZH, Simplex, Eca	Physische Eigenschaften: Jacket: Polyethylene (PE), Jacket thickness: 0.75mm, Jacket color: Black, Jacket material: PE, Jacket type: LSZH, Jacket weight: 100g/m, Jacket width: 12.5mm, Jacket length: 100m, Jacket diameter: 12.5mm, Jacket area: 156.25mm ² , Jacket volume: 1562500mm ³ , Jacket mass: 156.25g, Jacket density: 1.0g/cm ³ , Jacket modulus: 1.0GPa, Jacket strength: 100MPa, Jacket elongation: 100%, Jacket impact: 100J/m, Jacket fire: 100°C, Jacket smoke: 100g/m, Jacket halogen: 100g/m, Jacket toxicity: 100g/m, Jacket odor: 100g/m, Jacket taste: 100g/m, Jacket touch: 100g/m, Jacket sight: 100g/m, Jacket hearing: 100g/m, Jacket smell: 100g/m, Jacket taste: 100g/m, Jacket touch: 100g/m, Jacket sight: 100g/m, Jacket hearing: 100g/m, Jacket smell: 100g/m

Leistungsmerkmale / Transmission Properties


Impedanz	AWG	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
1	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
2	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
3	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
4	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
5	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
6	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
7	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
8	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
9	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	
10	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	

Intertek

ETL Verified Category 6 Customer Number: 1615281007-001

Intertek is a leading provider of testing, inspection, and certification services. Our ETL Verified Category 6 Customer Number: 1615281007-001 is a testament to our commitment to quality and compliance with industry standards.

For more information, please contact Intertek at www.intertek.com.

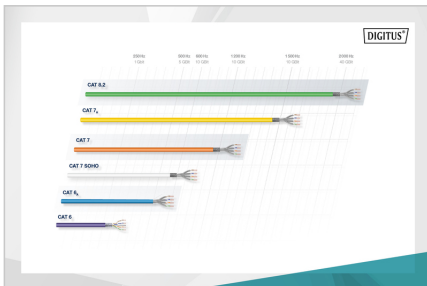

Digitus

CEP-Bestimmungen
Compliance Requirements

Bestimmung	Bestimmungsmerkmal	Bestimmungsmerkmal	Bestimmungsmerkmal
B2, C _{ca}	Stoffe hoch	1+	• Temperaturbeständigkeit • Flammhemmung • Rauchdichte • Flammverbreitung
D _{ca}	Mittel	3	• Temperaturbeständigkeit • Flammhemmung • Rauchdichte • Flammverbreitung
E _{ca}	Gerüst	1	• Temperaturbeständigkeit • Flammhemmung • Rauchdichte • Flammverbreitung

Bestimmungsmerkmal
Compliance Requirements

Bestimmungsmerkmal
Compliance Requirements

Bestimmungsmerkmal
Compliance Requirements



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com