

# DIGITUS® DIGITUS® CAT 6 F-UTP F-UTP

DK-1626-VH-1

EAN 4016032442042



**CAT 6 F-UTP installation cable, 250 MHz B2ca (EN 50575), AWG 23/1, 100 m paper box,**


DIGITUS® CAT 6 F-UTP installation cable, 250 MHz B2ca (EN 50575), AWG 23/1, 100 m paper box, Assortment: Twisted Pair Installation Cables

- 100 m length
- 4 twisted pairs
- 250 MHz B2ca (EN 50575)
- AWG 23/1
- 100 m length
- 4 twisted pairs
- 250 MHz B2ca (EN 50575)
- AWG 23/1
- 100 m length
- 4 twisted pairs
- 250 MHz B2ca (EN 50575)
- AWG 23/1

- Length: 150 m
- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: B2ca
- Length: 100 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	5.61	33.00	33.00	12.00	13,068.00
Packaging Unit Inside	1	5.61	0.00	0.00	0.00	0.00
Packaging Unit Single	1	5.61	33.00	33.00	12.00	13,068.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

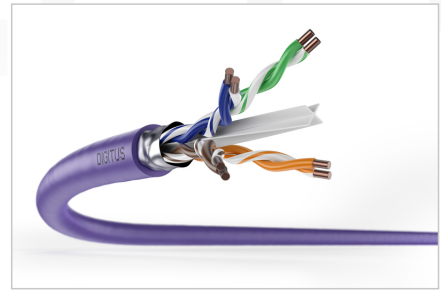

**DIGITUS**

AWG 23/1  
250 MHz  
1 Gbit Ethernet  
CAT 6  
20°/75°  
LSZH  
E<sub>ca</sub> CPRI class

**CAT 6 F/UTP Installation Cable, 100 m, Simplex, E<sub>ca</sub>**

**DIGITUS**

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E<sub>ca</sub>

Anwendungsbeispiel  
Example of use

**DIGITUS**

DK-1623-VH-1 // CAT 6 F/UTP Installation Cable, 100 m, Simplex, E<sub>ca</sub>

Kabelquerschnitt  
Cable cross section

**DIGITUS**

Produktdaten / Product Information	Physikalische Spezifikationen / Physical Properties
<b>Bestandteile / Components:</b> 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E <sub>ca</sub> 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E <sub>ca</sub> 100m CAT 6 F/UTP Installation Cable, 100m, Simplex, E <sub>ca</sub>	<b>Material:</b> Polyethylene (PE) <b>Color:</b> Purple <b>Length:</b> 100m <b>Weight:</b> 1.2kg <b>Temperature Range:</b> -40°C to 75°C <b>Flammretardant:</b> LSZH <b>Conductor Material:</b> Copper <b>Insulation Material:</b> Polyethylene (PE)

**DIGITUS**

Leistungsmerkmale / Performance Characteristics

10BASE-T	100BASE-TX	1000BASE-T	10GBASE-T
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100
100	100	100	100


**Intertek**

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

ETL Verified Category 6 Customers Number: 1615281007-001

Intertek

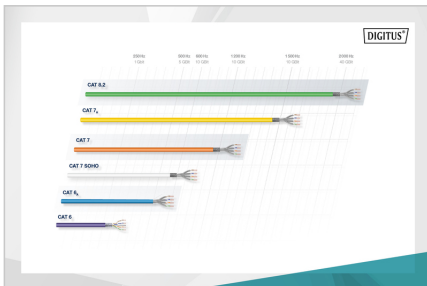

**DIGITUS**

CEP-Bestimmungen / CE Marking Requirements

CEP-Bestimmungen / CE Marking Requirements

CEP-Bestimmungen / CE Marking Requirements

CEP-Bestimmungen / CE Marking Requirements

CEP-Bestimmungen / CE Marking Requirements



Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- Installation only in dry rooms.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)