
DIGITUS® DIGITUS® CAT 6 □□□□□□□ F-UTP □□□□□□□□□□□□□□

DK-1626-VH-305

EAN 4016032442059

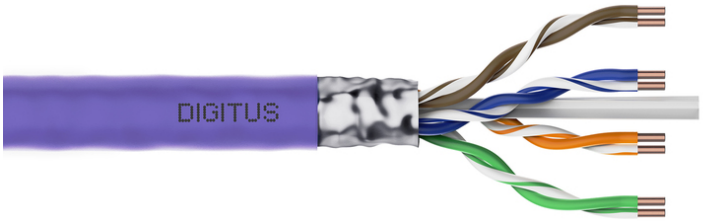

CAT 6 F-UTP installation cable, 250 MHz B2ca (EN 50575), AWG 23/1, 305 m drum,

DIGITUS® □□□□□□□□□□ 6 F-UTP □□□□□□□□□□□□□□□□□□ □□□□□□□ □□□□□□□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□□□ □□ □□□□□□□□□□□□□□□□ □□□□□□□□□□□ ISO/IEC 1180 AWG 23. □□□□□□□□□□□□ □□□□□□□□□□□□□ □ 4 □□□□□□ □□□□□ □ □□□□□□□□□□□□□ □□□□□□□ □□□□□□□□□, □□ □□□□□□□□□ □□□□□□□□□ □□□□□□□□□□□□□ □□□□□□□□□□ □□□□□□□□□□ □□□□□□ □□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□ □ □□□□□□□□□ □□□□□□ □□□□ □□□□□□ □□□□□.

- □□□□□□□□□□□□ □□□□□□□□□□
- □□□□□□□□□□: □□□□□□□□□□□□ □□□□□□□□ □□□□□□□□□□□
- □□□□□□ □□□□□□□□□□□□ □□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□: 8, □□□□□□ □ 4 □□□□□
- □□□□□□□□□□ □□□□: □□□□□-□□□□□□, □□□□□□□□□□-□□□□□□, □□□□□□□□-□□□□□□, □□□□□□□□□□-□□□□□□
- □□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□□: □□□□□□□□□□□□□□
- □□□□□□□□□□□□□□□ □□□□□□□□□□

- □□□□□□□□□□□□: 150 □ □□□□□.
- □□□□□□□□□ □□□□□□□ □□□□□□□□□□□□□□□□: 100±5 □□ □□ 1 □□□□ - 600 □□□□

Attributes

- Assortment: Twisted Pair Installation Cables
- Category: CAT 6
- Shielding: F-UTP, foil shielding
- CPR: B2ca
- Length: 305 m
- Color: violet
- Jacket: LSOH
- Structure: 4 x 2 AWG 23/1, solid twisted pair


Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	1	18.39	37.00	37.00	31.00	42,439.00
Packaging Unit Inside	1	18.39	0.00	0.00	0.00	0.00
Packaging Unit Single	1	18.39	37.00	37.00	31.00	42,439.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


More images:







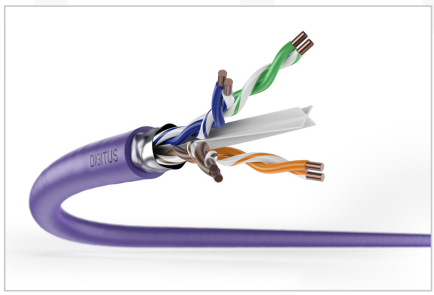


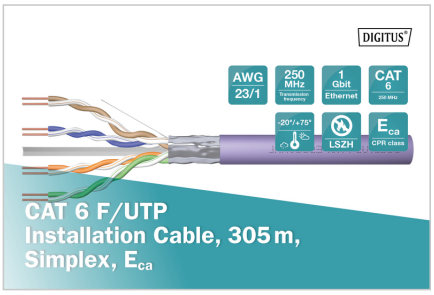

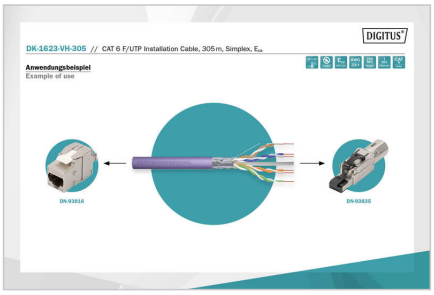


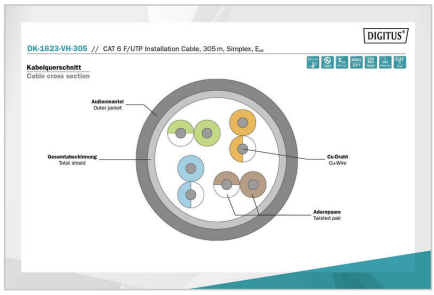


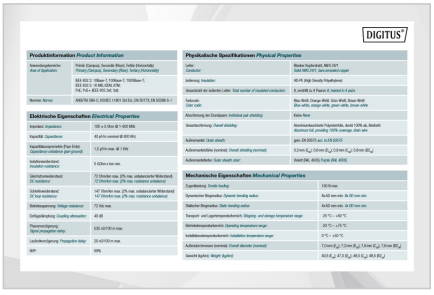

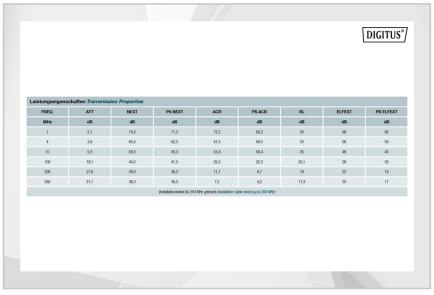



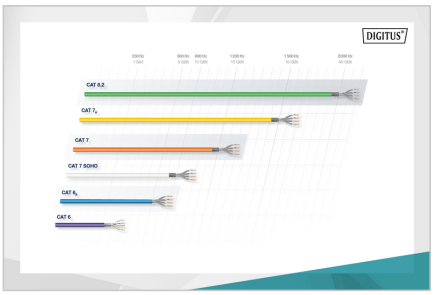

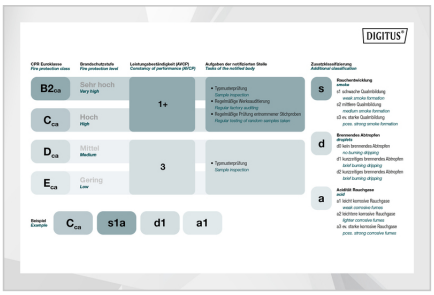

Safety notes

- Data cables must not be bent, stretched or twisted excessively. Sharp bends can damage the cable sheath and lead to failures or short circuits.
- Installation only by trained specialists.
- For indoor cables (LSZH jacket): Suitable only for installation in dry indoor environments.
- The data cable must not be in direct contact with other electrical cables or high-voltage sources in order to avoid electromagnetic interference.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com