


DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-050-R-10
EAN 4016032442318

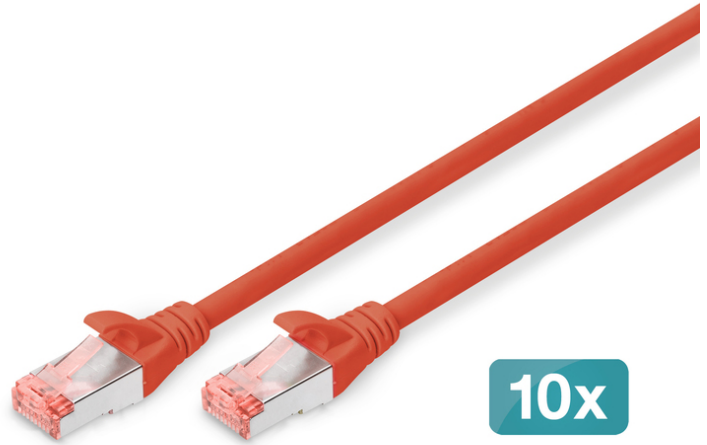

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, 10 pieces, color red

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, 10 pieces, color red. This product is designed for high-speed data transmission and is compliant with ISO/IEC 11801 and TIA/EIA 568 standards. It features a 5m length and is available in a pack of 10 pieces. The cable is constructed with 4 x 2 AWG 27/7 twisted pairs and is shielded with S-FTP technology. The connectors are modular RJ45 (8/8) plugs. The jacket is made of LSZH (Low Smoke Zero Halogen) material. The cable is available in red and is suitable for use in various network environments.






- 2 RJ45 (8P8C)
- LSZH jacket, flame retardant, low smoke, low halogen
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 5 m
- Color: red
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	8.50	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	1.70	22.00	30.00	36.00	23,760.00
Packaging Unit Single	1	1.70	2.20	17.00	25.00	935.00
Net single without Packaging	1	0.15	500.00	1.20	1.30	0.00

More images:

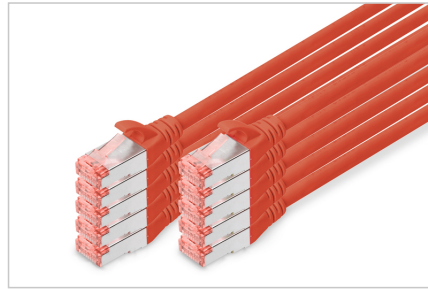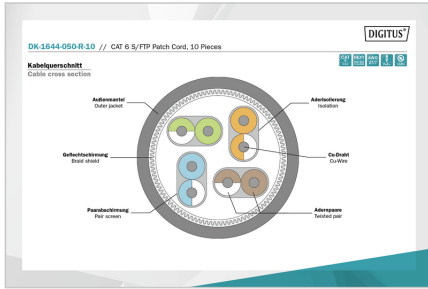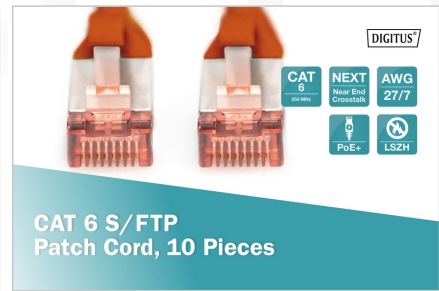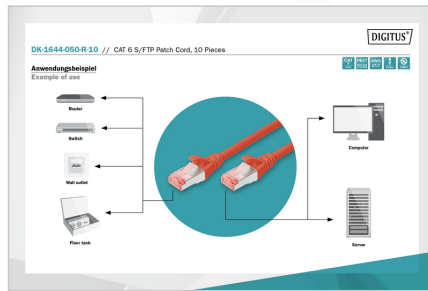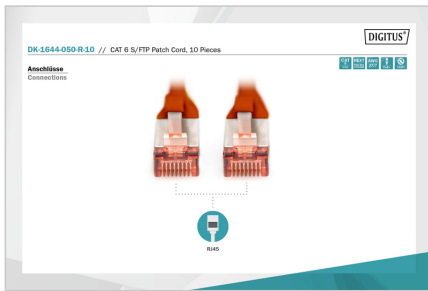

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com