DIGITUS® CAT 6 S/FTP patch cable, 10 pieces

DK-1644-050-WH-10

EAN 4016032442325

CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 5 m, 10 pieces, color white

⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ DIGITUS® ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ 6 ⊠⊠⊠⊠⊠⊠ E ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ISO/IEC 11801 ⊠ ⊠⊠⊠⊠⊠ DIGITUS® CAT 6. ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠ 250 ⊠⊠⊠, ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠, ⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ ⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠. ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ 6 ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠.

⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ ⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠.

- 2 ⊠⊠⊠⊠⊠⊠⊠ RJ45 (8P8C)
- ⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠ ⊠⊠⊠⊠⊠⊠⊠, ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠
- ⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠ ⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠
- ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠ ⊠⊠⊠⊠⊠⊠⊠⊠⊠⊠: ⊠⊠⊠⊠ (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 5 m
- Color: white
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	5	8.50	36.00	36.00	27.00	34,992.00
Packaging Unit Inside	1	1.70	22.00	30.00	36.00	23,760.00
Packaging Unit Single	1	1.70	2.20	17.00	25.00	935.00
Net single without Packaging	1	0.15	500.00	1.20	1.30	0.00

More images:

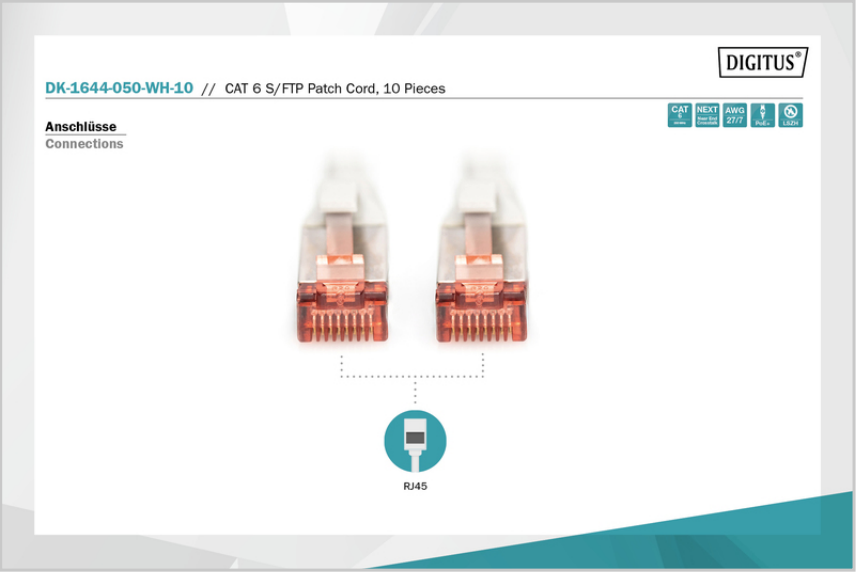
DIGITUS®
DK-1644-050-WH-10 // CAT 6 S/FTP Patch Cord, 10 Pieces
Anschlüsse
Connections
RJ45

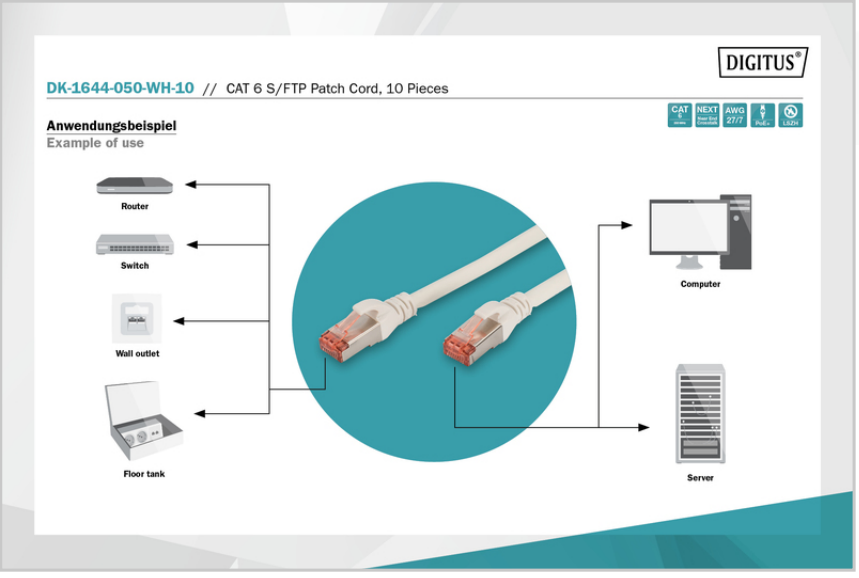
DIGITUS®
DK-1644-050-WH-10 // CAT 6 S/FTP Patch Cord, 10 Pieces
Anwendungsbeispiel
Example of use
Router
Switch
Wall outlet
Floor tank
Computer
Server

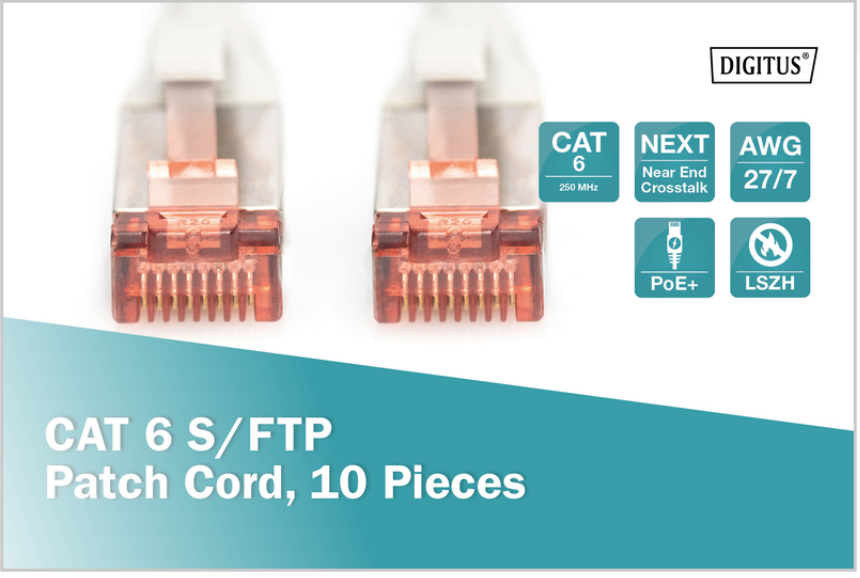
DIGITUS®
CAT 6
NEXT Near End Crosstalk
AWG 27/7
PoE+
LSZH
CAT 6 S/FTP
Patch Cord, 10 Pieces

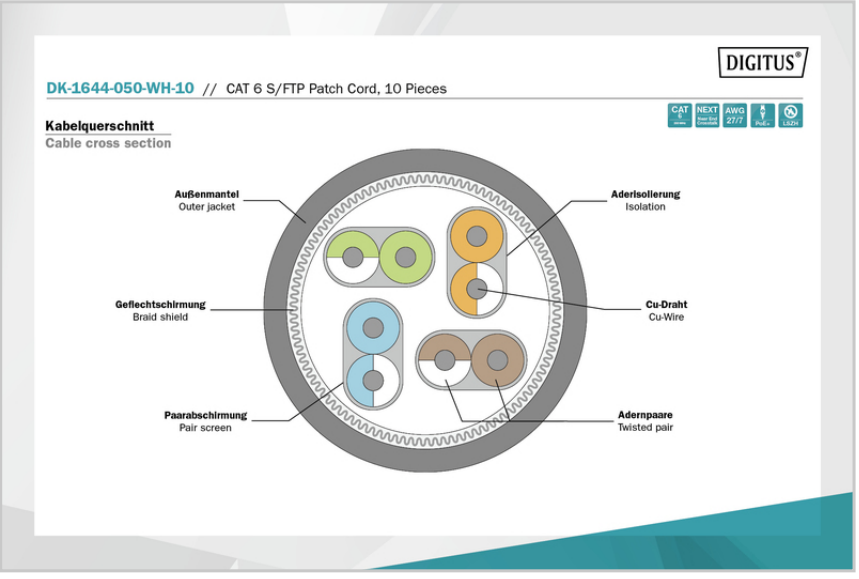
DIGITUS®
DK-1644-050-WH-10 // CAT 6 S/FTP Patch Cord, 10 Pieces
Kabelquerschnitt
Cable cross section
Außenmantel
Outer jacket
Aderisolierung
Isolation
Geflechtschirmung
Braid shield
Cu-Draht
Cu-Wire
Paarabschirmung
Pair screen
Adernpaare
Twisted pair

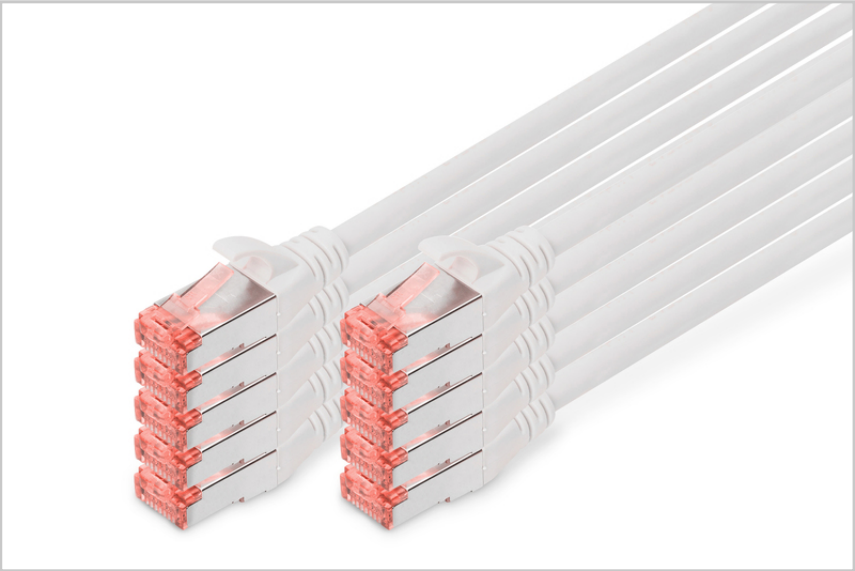

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com