DIGITUS® CAT 6 S/FTP Patch Cables, 10 m, Black, 5-Pack

DK-1644-100-BL-5

EAN 4016032442363



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 10 m, 5 pieces, color black

■■■■■■■■■■■■■■■■ ■■■■■■■ DIGITUS® ■■■■■■■■■■ 6 ■■■■■■■■ E ■■■■■■■■■■■■■■■■ ■ ■■■■■■■■■■■■■■■■ ■ ■■■■■■■■■■■■■■■■ ■ ■■■■■■■■■■■■■■■ ISO/IEC 11801 ■ ■■■■■■ DIGITUS® CAT 6. ■■■■■■■■■■ ■■■■■■■■■■■■■■■■■■■■■■ ■■■■■■■■■■■■■■■■ ■■ 250 ■■■■, ■■■■■■■■ ■■■■■■ ■■■■■■■■■■■■■■■■■■ ■■■■■■■■■■■■■■■■■■, ■■■■ ■■■■■■■■■■ ■■■■■■■■■■■■■ ■■■■■■■■■■■■ ■■■■■■ ■■ ■■■■■■■■■. ■■■■■■■■ ■■■■■■■■■■■■■■■■■■■■ ■■■■■■■■ ■■■■■■■■■■■■ 6 ■■■■■■■■■■ ■■■■■■■■ ■■■■■■■■ ■■■■■■■■■■ ■■■■■■.

■■■■■■■■■ ■■■■■■■■■■■■■■■■■■■■■■ ■ ■■■■■■■■■■ ■■■■■■ ■■■■ ■■■■■■ ■■■■■.

- 2 ■■■■■■■■ RJ45 (8P8C)
- ■■■■■■■■■■ ■ ■■■■■■■■■ ■■ ■■■■■■■, ■■■■■■■■■■■ ■ ■■■■■■■■■■
- ■■■■■■ ■■■■■■ ■■ ■■■■■■■■■■
- ■■■■■■■■■■■■ ■■■■■■■■■■■: ■■■■■ (Cu)


Attributes


- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: DIGITUS Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 10 m
- Color: black
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no


Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	6	10.90	54.00	20.00	30.00	32,400.00
Packaging Unit Inside	1	1.82	14.00	30.00	36.00	15,120.00
Packaging Unit Single	1	1.82	2.80	19.00	27.00	1,436.40
Net single without Packaging	1	0.21	1,000.00	1.20	1.30	0.00


More images:

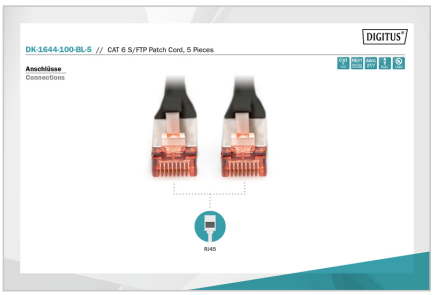

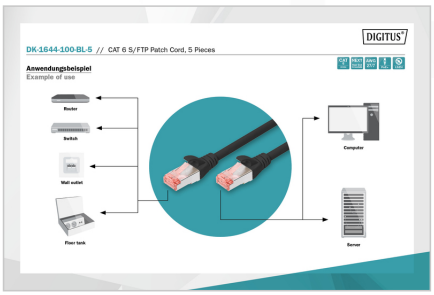

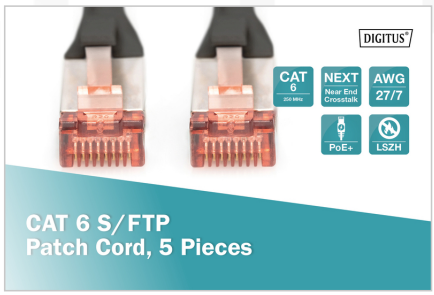

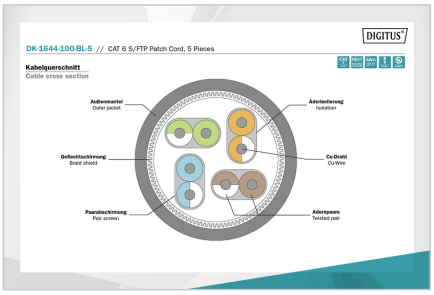

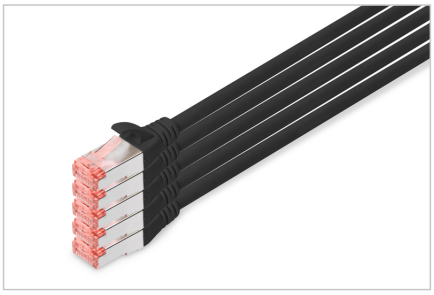

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com