


# DIGITUS® CAT 6 S/FTP patch cable, 5 pieces

DK-1644-100-Y-5  
EAN 4016032442400

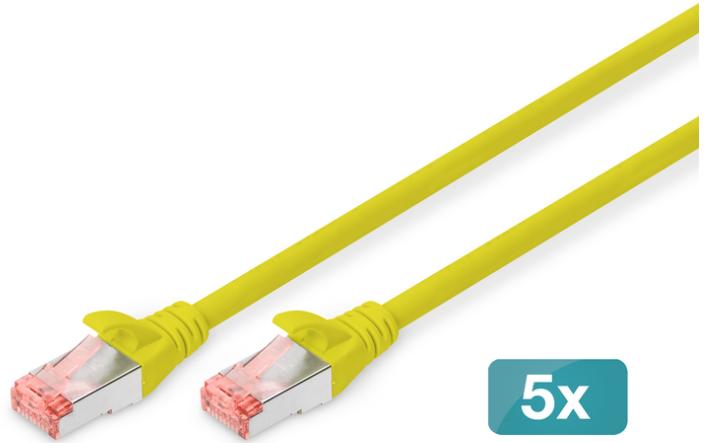

**CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 10 m, 5 pieces, color yellow**

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 10 m, 5 pieces, color yellow. This product is a high-speed network cable designed for use in structured cabling systems. It features a 4-pair twisted pair configuration with S-FTP shielding, providing excellent performance and reliability. The cable is made of copper conductors and is suitable for use in environments where low smoke and zero halogen (LSZH) are required. The length of the cable is 10 meters, and it is packaged in a carton containing 5 pieces. The cable is yellow in color and has RJ45 (8/8) modular plugs at both ends. The cable is compliant with the ISO/IEC 11801 standard and is suitable for use in Cat 6 networks. The cable is made of copper conductors and is suitable for use in environments where low smoke and zero halogen (LSZH) are required. The length of the cable is 10 meters, and it is packaged in a carton containing 5 pieces. The cable is yellow in color and has RJ45 (8/8) modular plugs at both ends. The cable is compliant with the ISO/IEC 11801 standard and is suitable for use in Cat 6 networks.






- 2 RJ45 (8P8C)
- LSZH jacket, low smoke and zero halogen
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor: Cu

**Attributes**

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 10 m
- Color: yellow
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	30	9.70	54.00	20.00	30.00	32,400.00
Packaging Unit Inside	5	1.62	14.00	30.00	36.00	15,120.00
Packaging Unit Single	1	0.32	2.80	19.00	27.00	1,436.40
Net single without Packaging	1	0.29	1,000.00	1.20	1.30	0.00

**More images:**

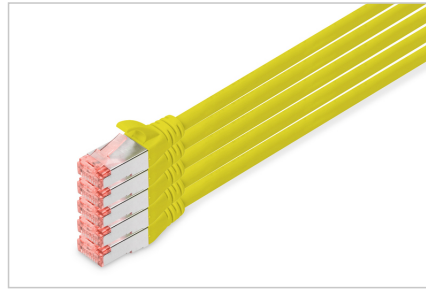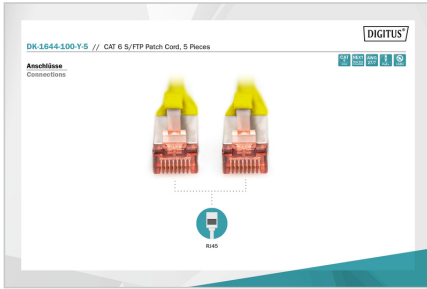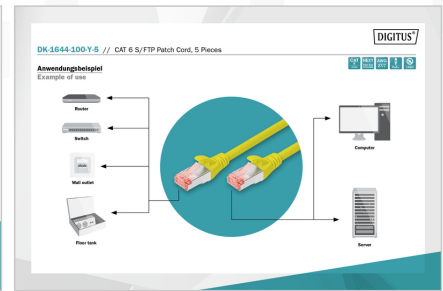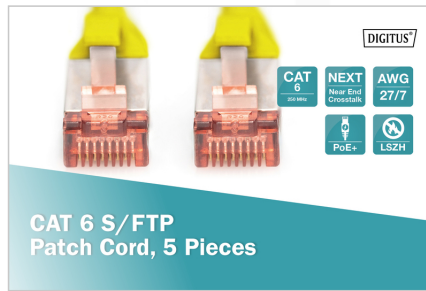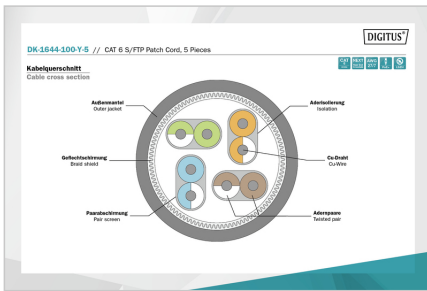

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)