DIGITUS® □□□□□□□□□ □□□□□□□□□□□□□□ □□□□□□ DIGITUS® □

DN-91410-LF

EAN 4016032445142



Modular Patch Panel, shielded, 24-port blank, 1U, Rack Mount, transp. label field, grey

□□□□□□□□□□ □□□□□□□□□□□□□□□□□ □□□□□□□ DIGITUS® □□□□□□□□□□□□□ □□□□□□□□□□□□□ □□□□ □□□□□□□□□ 19" □ □□□□□□□□□□ □□□□□□□□ □□□□□ keystone jack □□□□□□□□□□□□□□□□ SPCC, 1,55 mm cold tollrf C-□□□□□□ □ □□□□□□□□□□□□□□□□ □ JIS G3141-1996. □□□□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□ □□□□□□□□□□□□□□□ □□ ABS High-Im UL-94V-0. □□□□□□□ □□□□□□□□□ □□ □□□□□□□□□□□□□□ □□□□□□□□ □□□□ □□□□□□□ □□□□□□□□□□□□□□□□□ □ □□□□□ □□□□□□□□□ □□□□ □□□□□□□□ □□□□□□□□□□. □ □□□□□□□□□□ □□□□□□

- □□□□□□□□□□ □ □□□□□□□□□ DIGITUS® CAT5e, CAT6 □ CAT6A
- □□□□□□□□□ □□□□ □□□□□□□□□□ □□□□□□□□□□
- □□□□□□□□ □□□□□□□□□ □□□□ □□□□□□□□□□□□
- □□□□□□□□□□□□ □ □□□□□□□□□□□□□ □ □□□□□□□□□□□□□□□□ □□□□□□□□□ DIGITUS®
- □□□□□□□□□ □□□□□□ □ □□□□□□□ □□□□□□

- □□□□□□□□□□ □□□□□□□ □□□□□□□□ □□□□□□□□□ □□□□ □□□□□□□□□□□□□□□□□□□□□□ □ □□□
- □□□□□□□□□□□□□□□ □ □□□□□□□ □□□□□□□□□□□□□□□□□ □□□□□□□□
- □□□□□□□□□ □□□□□□□□ □□□□□□□□□□□□□: -20 □□ +75°C
- □□□□□□□□□□□□ □□□□□ □□□□□□
- □□□□□: □□□□□□ RAL 7035


Attributes

- Color: light grey, RAL 7035
- Ports: 24
- Units: 1
- Color: grey

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	7.70	31.00	54.00	28.00	46,872.00
Packaging Unit Inside	1	0.77	12.00	52.00	5.00	3,120.00
Packaging Unit Single	1	0.77	12.00	52.00	5.00	3,120.00
Net single without Packaging	1	0.50	9.30	48.30	4.50	0.00

More images:

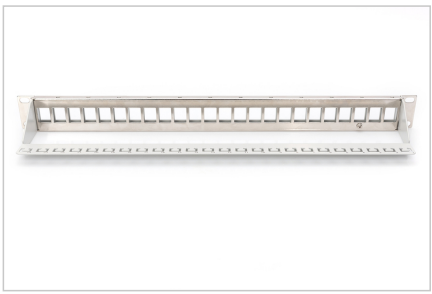



Safety notes

- Protect product from moisture
- Avoid antistatic charging when installing the product
- Observe the specifications of the raw cable manufacturer during installation

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com