DIGITUS Conversor de Média Industrial Gigabit RJ45, SC 0,5km

DN-652101
EAN 4016032445715

Industrial Gigabit Ethernet Media Converter, MM SC connector, 850nm, up to 0.5km

Os conversores de média da DIGITUS® consistem na solução ideal para a migração de sinais de fibra de vidro. A partir de agora, é possível aceder à tecnologia de fibra e transferir os sinais de rede ao longo de vários quilómetros sem ter de substituir toda a infra-estrutura de rede. A nossa grande variedade de produtos corresponde às suas necessidades individuais. O funcionamento intuitivo garante uma instalação fácil e rápida. Os anos de experiência e a grande variedade de produtos permitem que a DIGITUS® se torne num parceiro fiável para a sua engenharia de rede.

A solução de conversão ideal para transmissão de dados óticos

- Converte sinais de rede baseados em cabo em sinais de fibra ótica
- Alta qualidade e excelente proteção contra falhas
- 10/100/1000Base-TX para 1000Base-SX
- Ligações: 1x RJ45, 1x SC Duplex
- Alcance até 0,5km
- Comprimento de onda: 850nm
- Fibra dupla de modo múltiplo
- Reconhecimento automático de cabo – função auto MDI-/ MDI-X
- LED de diagnóstico sobre o estado e monitorização de atividade
- Adequado para cabos de fibra de vidro (modo múltiplo) 50/125µm, 62,5/125µm e 100/140µm
- Caixa metálica compacta, robusta
- Excelente proteção contra curto-circuitos
- Proteção contra relâmpagos e sobretensão
- Calha DIN (calha de sustentação) e possibilidade de montagem na parede
- Alimentação redundante: 12 a 56V DC, alimentação redundante com função protetora de inversão de conexão
- Temperatura de funcionamento ampliada, -40°C a +85°C
- Ligação de terminal amovível
- Classe de protecção IP40

Attributes

- Connector 1: RJ45
- Connector 2: SC
- Mode: Multimode
- Distance (km): 0.5
- DDM Support: no
- Industrial usage: yes
- Broadcasting Mode: Unidirectional
- PoE injector: no
- Ethernet speed: Gigabit

Package contents

- Conversor de Média Industrial Gigabit RJ45, SC 0,5km
- Peso: 20 g

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	10.00	45.00	36.00	37.00	59,940.00
Packaging Unit Inside	1	0.50	7.00	18.00	22.00	2,772.00
Packaging Unit Single	1	0.50	7.00	18.00	22.00	2,772.00
Net single without Packaging	1	0.30	4.00	8.00	12.00	0.00

More images:

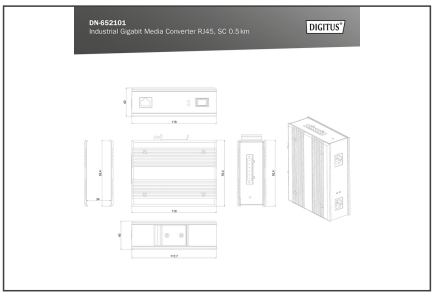

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com