# DIGITUS® HP-compatible SFP+ 10G MM 850nm 300m with DDM

**DN-81200-01**

**EAN 4016032446149**



**10G SFP+ Module, Multimode, DDM, HP-compatible LC Duplex Connector, 850nm, up to 300m, HP**

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Wether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

**The plug and play fiber connection**

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Supports DDM (Digital Diagnostic Monitoring)
- High quality and excellent reliability
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Duplex
- Wavelength: 850nm
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Empfangssensitivität: Minimum -11,5 dBm
- For a distance of up to 0.3km
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C
- Compatible with the following manufacturers: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik , ENTERASYS, RIVERSTONE , Unifi, Ubiquiti, ZyXEL, ZTE

**Attributes**

- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

**Package contents**

- SFP module


**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 20 | 0.80 | 41.00 | 26.00 | 16.00 | 17,056.00 |
| **Packaging Unit Inside** | 1 | 0.04 | 1.50 | 9.00 | 3.00 | 40.50 |
| **Packaging Unit Single** | 1 | 0.04 | 12.00 | 9.30 | 3.20 | 357.12 |
| **Net single without Packaging** | 1 | 0.03 | 5.60 | 1.40 | 1.10 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**



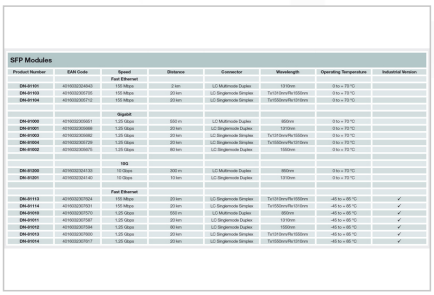

SFP Modules

| Product Number | EAN Code | Speed | Distance | Connector | Wavelength | Operating Temperature | Industrial Version |
|---|---|---|---|---|---|---|---|
| | | Fast Ethernet | | | | | |
| DN-81101 | 4016032324043 | 155 Mbps | 2 km | LC Multimode Duplex | 1310nm | 0 to + 70 °C | |
| DN-81103 | 4016032307735 | 155 Mbps | 20 km | LC Singlemode Simplex | Tx1310nm/Rx1550nm | 0 to + 70 °C | |
| DN-81104 | 4016032307712 | 155 Mbps | 20 km | LC Singlemode Simplex | Tx1550nm/Rx1310nm | 0 to + 70 °C | |
| | | | | | | | |
| | | Gigabit | | | | | |
| DN-81000 | 4016032305001 | 1.25 Gbps | 550 m | LC Multimode Duplex | 850nm | 0 to + 70 °C | |
| DN-81001 | 4016032305988 | 1.25 Gbps | 20 km | LC Singlemode Simplex | 1310nm | 0 to + 70 °C | |
| DN-81003 | 4016032305982 | 1.25 Gbps | 20 km | LC Singlemode Simplex | Tx1310nm/Rx1550nm | 0 to + 70 °C | |
| DN-81004 | 4016032305739 | 1.25 Gbps | 20 km | LC Singlemode Simplex | Tx1550nm/Rx1310nm | 0 to + 70 °C | |
| DN-81002 | 4016032305975 | 1.25 Gbps | 80 km | LC Singlemode Duplex | 1550nm | 0 to + 70 °C | |
| | | | | | | | |
| | | 10G | | | | | |
| DN-81200 | 4016032324135 | 10 Gbps | 300 m | LC Multimode Duplex | 850nm | 0 to + 70 °C | |
| DN-81201 | 4016032324142 | 10 Gbps | 10 km | LC Singlemode Duplex | 1310nm | 0 to + 70 °C | |
| | | | | | | | |
| | | Fast Ethernet | | | | | |
| DN-81113 | 4016032307024 | 155 Mbps | 20 km | LC Singlemode Simplex | Tx1310nm/Rx1550nm | -45 to + 85 °C | ✓ |
| DN-81114 | 4016032307031 | 155 Mbps | 20 km | LC Singlemode Simplex | Tx1550nm/Rx1310nm | -45 to + 85 °C | ✓ |
| DN-81010 | 4016032307574 | 1.25 Gbps | 550 m | LC Multimode Duplex | 850nm | -45 to + 85 °C | ✓ |
| DN-81011 | 4016032307567 | 1.25 Gbps | 20 km | LC Singlemode Duplex | 1310nm | -45 to + 85 °C | ✓ |
| DN-81012 | 4016032307594 | 1.25 Gbps | 80 km | LC Singlemode Duplex | 1550nm | -45 to + 85 °C | ✓ |
| DN-81013 | 4016032307600 | 1.25 Gbps | 20 km | LC Singlemode Simplex | Tx1310nm/Rx1550nm | -45 to + 85 °C | ✓ |
| DN-81014 | 4016032307617 | 1.25 Gbps | 20 km | LC Singlemode Simplex | Tx1550nm/Rx1310nm | -45 to + 85 °C | ✓ |



**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com