DIGITUS® HP-compatible SFP+ 10G MM 850nm 300m with DDM

DN-81200-01

EAN 4016032446149



10G SFP+ Module, Multimode, DDM, HP-compatible LC Duplex Connector, 850nm, up to 300m, HP

□□□□□□□ □□□□□□□□□□□□□ DIGITUS® Mini GBIC (SFP) □□□□□□□□□□□□□□□ □□□□□□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□. □□□□□ □□ □□□□□□□□□□□□□ □□□□□□ □□□□□□□□□□□□□□□, □ Source Agreement) □□□□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□ □ □ □□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□

□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□□□ Plug and Play

- □□□□□□□ Mini GBIC SFP (□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□)
- □□□□□□□□□□□□□□□ DDM (Digital Diagnostic Monitoring)
- □□□□□□□□ □□□□□□□□□□ □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□
- 10 Gbps Maximum Data Rate
- Compliant to IEEE802.3ae 10 Gigabit Standard
- □□□□□□ 1 □□□□□□□□□□ □□□□□□□□ □□ EN 60825-1
- □□□□□□□□□ □□□□□□□□□□□□ Plug and Play
- □□□□□□□□□□□ □□ □□□□□□□□□□□□ MSA (□□□□□□□□ □□□□□□□□□□□□)
- □ □□□□□□□□□□□□□□□ □□□□□□□□□□□□□□ □□□□□□□
- □□□□ □□□□□□□□□□□□□□: 1 □□□□□□□□□ LC
- □□□□□□ □□□□□□: 850 □□
- Transmission Power: Minimum -5 dBm, Maximum -1 dBm
- Sensitivity Receiving Power: Minimum -11.5 dBm
- For a distance of up to 0.3km
- □□□□□□□□□□ □□□□□□□□□□□□□□□□□□□□□□□□ □□□□□□□□□□
- □□□□□□□□□□□□□□□□□□□□ 3,3 □
- □□□□□□□□ □□□□□□□□□□□□□□□: 0-70 °C

Attributes

- Mode: Multimode
- Connector: LC
- Distance (km): 0.3
- Wavelength: 850 nm
- DDM Support: yes
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

Package contents


- □□□□□□□ SFP

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.04	1.50	9.00	3.00	40.50
Packaging Unit Single	1	0.04	12.00	9.30	3.20	357.12
Net single without Packaging	1	0.03	5.60	1.40	1.10	0.00

More images:



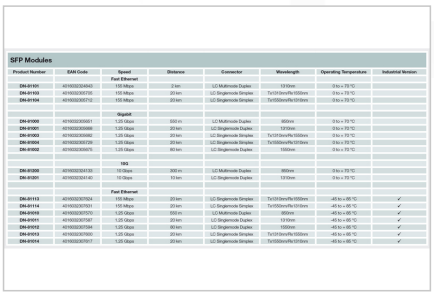

SFP Modules

Product Number	EAN Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
		Fast Ethernet					
DN-81101	4016032324043	155 Mbps	2 km	LC Multimode Duplex	1310nm	0 to + 70 °C	
DN-81103	4016032307735	155 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81104	4016032307712	155 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
		Gigabit					
DN-81000	4016032305001	1.25 Gbps	550 m	LC Multimode Duplex	850nm	0 to + 70 °C	
DN-81001	4016032305988	1.25 Gbps	20 km	LC Singlemode Simplex	1310nm	0 to + 70 °C	
DN-81003	4016032305982	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81004	4016032305739	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
DN-81002	4016032305975	1.25 Gbps	80 km	LC Singlemode Duplex	1550nm	0 to + 70 °C	
		10G					
DN-81200	4016032324135	10 Gbps	300 m	LC Multimode Duplex	850nm	0 to + 70 °C	
DN-81201	4016032324142	10 Gbps	10 km	LC Singlemode Duplex	1310nm	0 to + 70 °C	
		Fast Ethernet					
DN-81113	4016032307024	155 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-45 to + 85 °C	✓
DN-81114	4016032307031	155 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-45 to + 85 °C	✓
DN-81010	4016032307574	1.25 Gbps	550 m	LC Multimode Duplex	850nm	-45 to + 85 °C	✓
DN-81011	4016032307567	1.25 Gbps	20 km	LC Singlemode Duplex	1310nm	-45 to + 85 °C	✓
DN-81012	4016032307594	1.25 Gbps	80 km	LC Singlemode Duplex	1550nm	-45 to + 85 °C	✓
DN-81013	4016032307600	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-45 to + 85 °C	✓
DN-81014	4016032307617	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-45 to + 85 °C	✓



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com