


DIGITUS® CAT 6 U/UTP data cable - underground cable, 500 m, simplex, PE

DK-1613-VH-5-OD
EAN 4016032446163

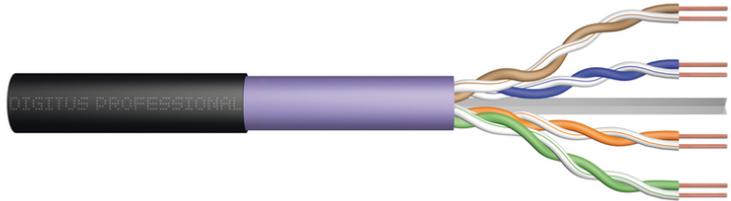

CAT 6 U-UTP outdoor installation cable, 250 MHz inner Eca (LSZH-1), AWG 23/1, 500m drum, sx, bl/pu

DIGITUS Category 6 U-UTP installation cables have been developed and tested according to ISO/IEC 11801, DIN EN 50173 and DIN EN 50288-5-1 Category 6 specifications. Each cable consists of 8 color-coded AWG 23 polyethylene insulated conductors. The conductors are twisted into 4 pairs of varying lengths. Imprint details on the outer jacket include the brand name, part number and cable length 0 - 350 meters. The cable is packaged in a cardboard pull-out box for ease of installation.

Future-oriented standards and high-end quality for your network.

- Physical properties:
- Conductor: Bare copper wire, AWG 23/1
- Insulation: HD-PE (High Density Polyethylene)
- Total number of insulated conductors: 8, twisted into 4 pairs
- Color code: Blue-white, orange-white, green-white, brown-white
- Shielding of the individual pairs: None
- Overall shielding: None
- Outer sheath: Eca acc. to EN 50575; LSZH
- Outer sheath thickness (nominal): 0.5 mm (Eca)
- Outer sheath color: violet (Eca sheath); black (PE sheath)
- Mechanical properties:
- Strain relief: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Transport and storage temperature range: -20 °C to +60 °C

- Operating temperature range: -20 °C to +75 °C
- Installation temperature range: 0 °C to +50 °C
- Outer diameter (nominal): 6.8 mm (Eca)
- Weight (kg/km): 48 kg (Eca)
- Impedance: 100 ± 5 Ohm @ 1-250 MHz
- Capacitance: 40 pF/m nominal @ 800 MHz
- Capacitance unbalance (pair-earth): 1.5 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC resistance: 72 Ohm/km max. (2% max. unbalanced resistance)
- Loop resistance: 147 Ohm/km max. (2% max. unbalanced resistance)
- Operating voltage: 72 Vdc max.
- Coupling attenuation: CA-Type 3
- Phase delay: 535 nS/100 m max.
- Time delay: 20 nS/100 m max.
- Isolation class: "b" according to EN 50174-2
- NVP: 69%

Attributes

- Asortiman: Instalacijski kabeli s upredenim paricama
- Kategorija: CAT 6
- Oklop: U-UTP, neoklopljeno
- CPR: Eca
- Duljina: 500 m
- Boja: ljubičasti
- Kapica: LSOH
- Struktura: 4 x 2 AWG 23/1, kruto upletena parica

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	1	30.90	50.00	50.00	24.00	60,000.00
Packaging Unit Inside	1	30.90	50.00	50.00	24.00	60,000.00
Packaging Unit Single	1	30.90	50.00	50.00	24.00	60,000.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

