

# DIGITUS® HDMI High Speed with Ethernet Connection Cable

DB-330123-050-S

EAN 4016032446613



## HDMI Premium High Speed Connection Cable, Type A M/M, 5.0m, w/Ethernet, Ultra HD, 4K@60Hz, gold, bl

This HD and 3D suitable cable used for connection of audio/video devices, such as Blu-ray player, game pads or consoles, etc., for example, with a TV, monitor or computer. Also capable for use of any IP-based application.

### 4K/Ultra HD and HDR capable + Ethernet connectivity

- Support of HDMI 2.0 Features
- Supports Ultra HD (60Hz), 4096 x 2160p resolution
- Support 4K 3D
- Support of High Dynamic Range (HDR)
- Support Audio Return Channel (ARC)
- Support Consumer Electronic Control (CEC)
- Support Lip-Sync (audio/video synchronisation)
- Dolby TrueHD capable
- Multi Stream audio/video support
- 21:9 Cinemascope support


- 32 Channel Audio support
- With Ethernet Channel (HEC)

### Attributes

- AWG: 30
- Feritni filtar: nema
- HDMI-norma: Premium HDMI velike brzine s Ethernetom
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: plastično
- Konektor 1: HDMI tip A, utikač
- Konektor 2: HDMI tip A, utikač
- Površina konektora: pozlaćeno
- rezolucija maks.: 3840 x 2160 piksela, 60 Hz
- Duljina: 5 m
- AOC - aktivni optički kabel: Ne
- oklop: dvostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	9.00	57.00	32.00	35.00	63,840.00
Packaging Unit Inside	5	2.25	14.20	30.00	32.00	13,632.00
Packaging Unit Single	1	0.45	18.70	29.90	2.50	1,397.82
Net single without Packaging	1	0.17	15.00	15.00	2.50	0.00

**More images:**

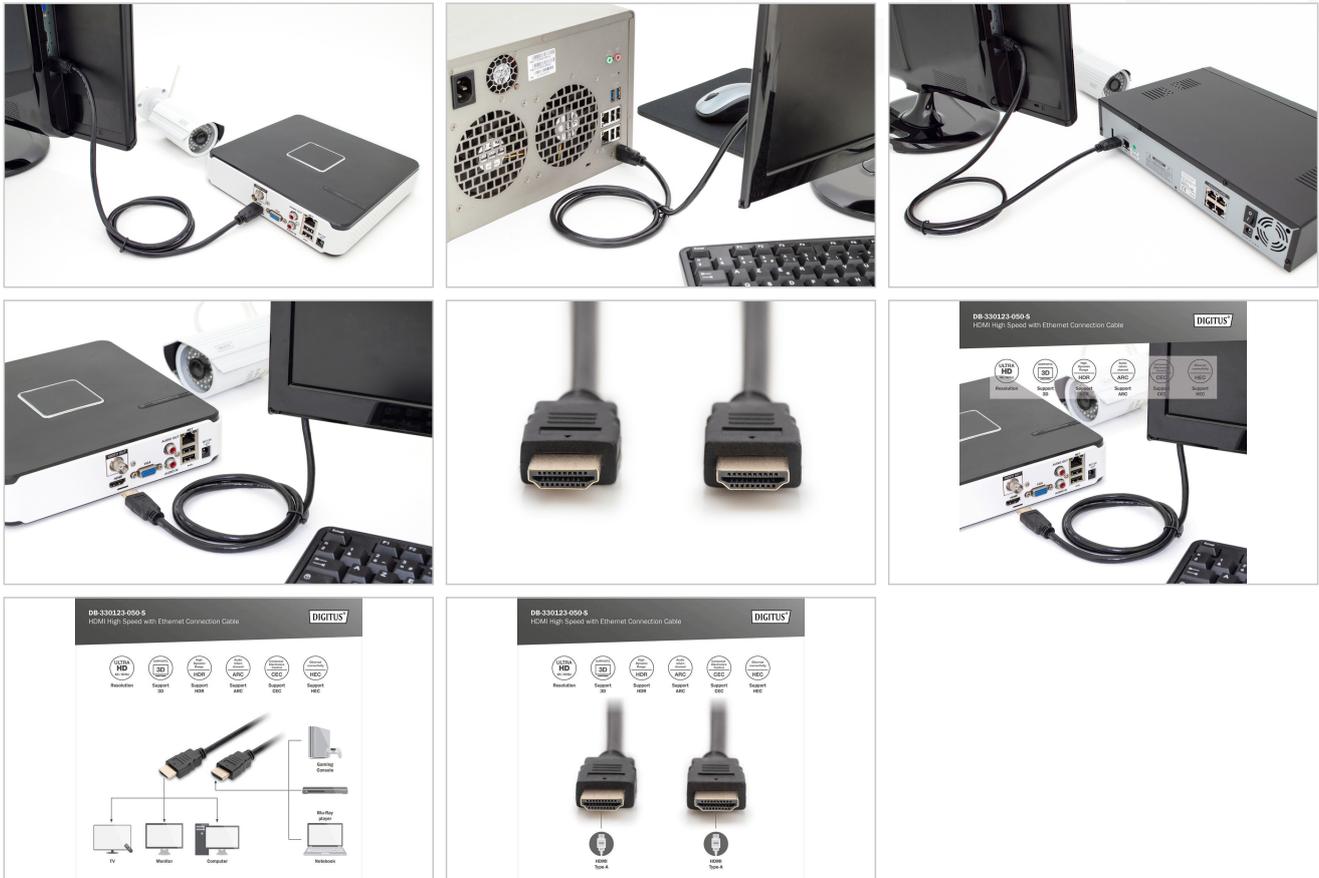

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)