

# DIGITUS® Cabo de ligação HDMI Premium de alta velocidade com Ethernet

DB-330123-010-S

EAN 4016032446637



## Cabo de ligação HDMI Premium de alta velocidade, tipo A St/St, 1,0 m, com/Ethern, Ultra HD, 4K@60Hz, dourado, p/b

Este cabo compatível com HD e 3D é utilizado para ligar dispositivos áudio/vídeo, como leitores Blu-ray, consolas de jogos, etc., a um televisor, monitor ou PC. Também adequado para utilização com qualquer aplicação baseada em IP.

### Compatível com 4K/Ultra HD e HDR + conectividade Ethernet

- Suporta funcionalidades HDMI 2.0
- Suporta resolução Ultra HD (60Hz), 4096 x 2160p
- Suporte 4K 3D
- Suporte para High Dynamic Range (HDR)
- Suporta canal de retorno de áudio (ARC)
- Suporta o Controlo Eletrónico do Consumidor (CEC)
- Suporta sincronização labial (sincronização de áudio/vídeo)
- Compatível com Dolby TrueHD
- Suporte para vários fluxos de áudio/vídeo
- Suporte para Cinemascope 21:9

- Suporte de áudio de 32 canais
- Com canal Ethernet (HEC)


### Attributes

- AWG: 30
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: plastic
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 1 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	25.00	34.00	26.00	44.00	38,896.00
Packaging Unit Inside	50	12.50	16.00	24.00	42.00	16,128.00
Packaging Unit Single	1	0.25	2.00	5.50	23.00	253.00
Net single without Packaging	1	0.17	15.00	15.00	2.50	0.00

**More images:**

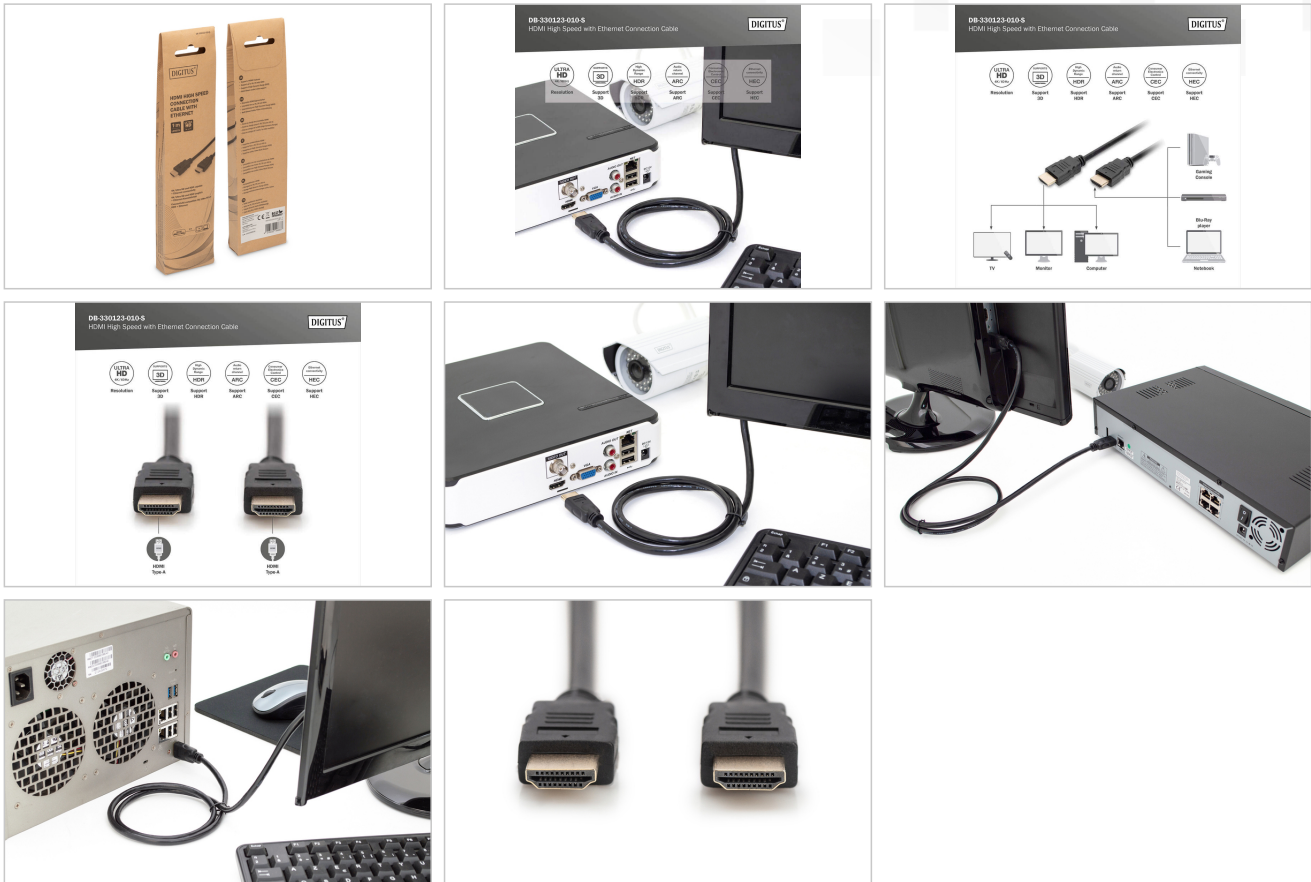

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)