DIGITUS® □□□□□□□□□□□□□□□ □□□□□□ HDMI High Speed □ Ether

AK-990920-020-S

EAN 4016032451990

HDMI High Speed connection cable, type A M/M, 2.0m, 10er Set, w/Ethernet, UHD 60p, gold, bl

Этот кабель поддерживает HD и 3D и используется для подключения аудио ... ая видеоустройств , например , проигрывателей Blu-ray, игровых

Идеально подходит для просмотра потокового видео , игры или в качестве расширения рабочего места

- Поддержка до 4K 50/60p
- Поддержка разрешения видео до 4096 x 2160 пикселей
- Поддержка 3D
- Поддержка технологии реверсивного звукового канала (ARC)
- Поддержка удаленного управления электронными устройствами (CEC)
- Поддержка Lip-Sync (синхронизация звука и изображения)
- Поддержка Dolby TrueHD
- Поддержка многопоточной трансляции звука и изображения
- Поддержка системы широкоэкранного кино Синемаскоп 21:9
- Поддержка 32 аудиоканалов
- С каналом Ethernet (HEC)

Attributes

- AWG: 30
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	7.05	40.00	38.00	21.00	31,920.00
Packaging Unit Inside	12	1.41	5.00	44.00	44.00	9,680.00
Packaging Unit Single	1	0.12	5.00	44.00	44.00	9,680.00
Net single without Packaging	1	0.00	17.00	13.00	3.00	0.00

More images:



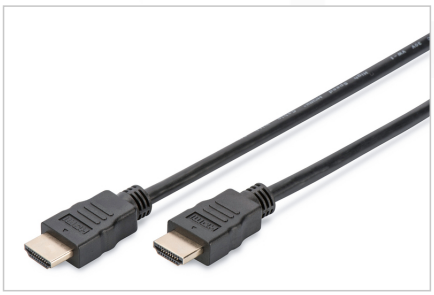

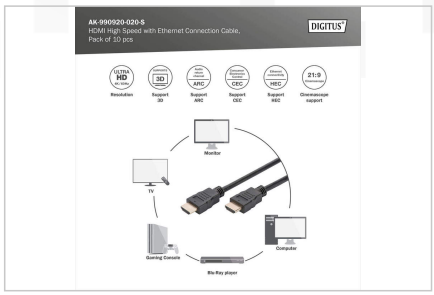



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com