

DIGITUS® 4K HDMI over CAT/IP (PoE), PoE

DS-55124

EAN 4016032455202



4K HDMI Extender Set over IP/CAT 5, 6 (120m) complete PoE powered, UHD 4K@30Hz

Das Produkt ermöglicht die Übertragung von 4K HDMI (DS-55124) über CAT 5/6 oder IP (PoE) bis zu einer Distanz von 120m. Die Übertragung erfolgt über CAT 5, CAT 5e, CAT 6 oder CAT 7. Die Auflösung beträgt bis zu 3840 x 2160 Pixel bei 30Hz. Das Produkt ist PoE-fähig und kann über PoE (Power over Ethernet) mit Strom versorgt werden.

Das Produkt ist PoE-fähig und kann über PoE (Power over Ethernet) mit Strom versorgt werden.

- 4K HDMI (DS-55124) über CAT 5, CAT 5e, CAT 6 oder CAT 7
- Auflösung: 4K (30 Hz), 3840 x 2160 Pixel
- PoE (Power over Ethernet) – ja
- CAT 5, CAT 5e, CAT 6 oder CAT 7
- 4K (30 Hz), 3840 x 2160 Pixel
- HDMI: 10,2 Gbit/s
- HDCP: 1.4
- HDTV Standard: Ultra HD 4K
- Auflösung: 4K (30 Hz), 1080p, 1080i, 720p, 576p, 576i, 480p, 480i
- HDTV
- Deep Color (24 Bit)
- LPCM
- Temperaturbereich: 0-60 °C
- PoE-fähig

- PoE (Power over Ethernet) – ja
- CAT 5, CAT 5e, CAT 6 oder CAT 7
- 4K (30 Hz), 3840 x 2160 Pixel
- PoE (Power over Ethernet) – ja

Attributes




- HDTV Standard: Ultra HD 4K
- Resolution max.: 3840 x 2160 Pixel, 30Hz
- Category: CAT 5e
- Distance: 120 m
- KVM: no
- PoE (Power over Ethernet): yes
- Transmission technology: CAT, IP
- Video connection ports: HDMI

Packaging contents

- 1 x 4K HDMI Extender Set over IP/CAT 5, 6 (120m) complete PoE powered, UHD 4K@30Hz
- 1 x 4K HDMI Extender Set over IP/CAT 5, 6 (120m) complete PoE powered, UHD 4K@30Hz
- 1 x 4K HDMI Extender Set over IP/CAT 5, 6 (120m) complete PoE powered, UHD 4K@30Hz
- 1 x 4K HDMI Extender Set over IP/CAT 5, 6 (120m) complete PoE powered, UHD 4K@30Hz

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	10	8.50	38.00	27.00	42.00	43,092.00
Packaging Unit Inside	1	0.85	24.00	17.60	8.00	3,379.20
Packaging Unit Single	1	0.85	24.00	17.60	8.00	3,379.20
Net single without Packaging	1	0.55	11.90	9.40	2.40	0.00

More images:

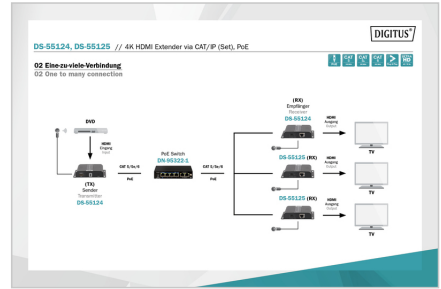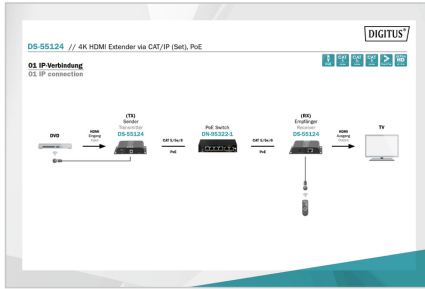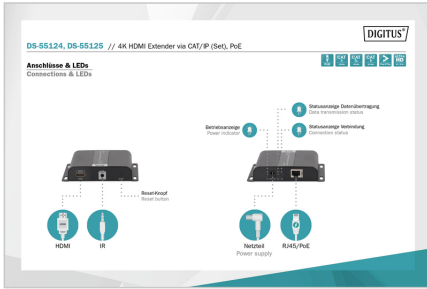

Safety notes

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com