

# DIGITUS® Cabo de ligação USB-C, USB-A - USB-C

AK-300154-010-S

EAN 4016032455233



**Cabo de ligação USB tipo C, tipo USB-A para USB-C St/St, 1.0m, 5V3A, 15W, 480MB, versão 2.0, bw**

Para ligar dispositivos finais USB externos (com tomada C, por exemplo, tablet, computador portátil ou smartphone) ao anfitrião USB (por exemplo, PC ou computador portátil). Taxa de transferência até 480 Mbps (alta velocidade).

**Para sincronização e carregamento super-rápidos**


- Transferência rápida de dados USB 2.0 com até 480 Mbps
- Suporta uma fonte de alimentação até 5V3A, 15W
- Suporta a especificação USB PD (Power delivery).
- A ficha USB tipo C pode ser utilizada em ambos os lados

**Attributes**

- AWG: 22
- Color cable: black
- Connector 1: USB A, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 1 m
- Shielding: Unshielded
- USB-C Products: yes

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	300	11.30	44.00	33.00	22.00	31,944.00
Packaging Unit Inside	10	0.38	28.00	19.00	6.00	3,192.00
Packaging Unit Single	1	0.04	25.00	14.00	0.60	210.00
Net single without Packaging	1	0.03	14.00	11.00	0.50	0.00

**More images:**

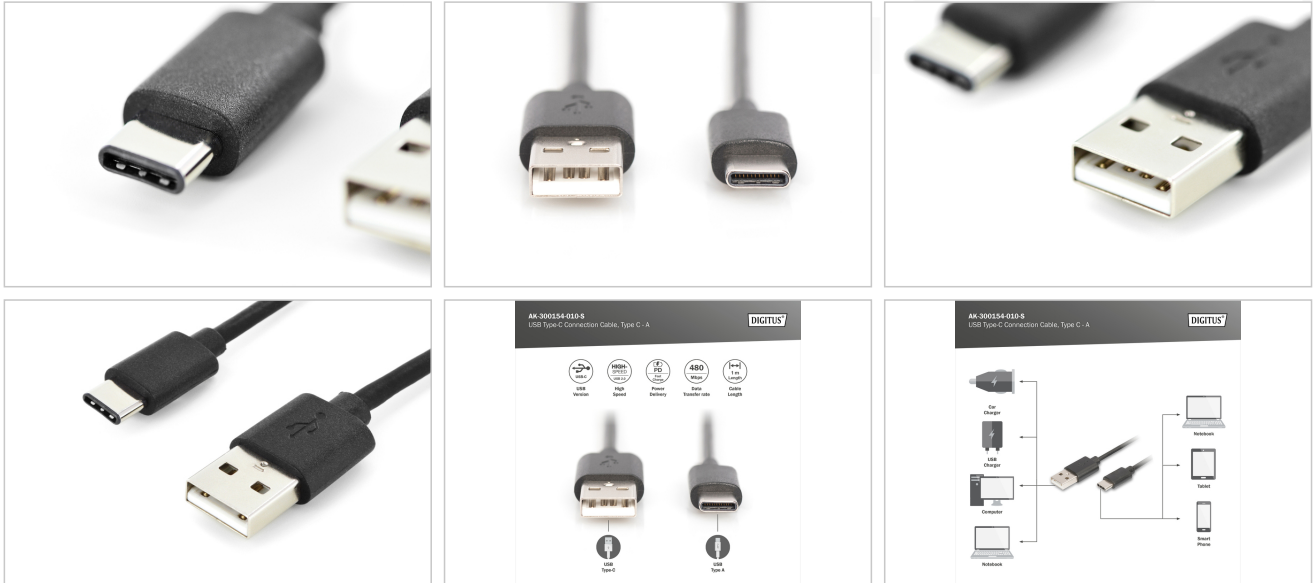

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)