

# DIGITUS® USB Type-C, Type USB-A

AK-300154-010-S  
EAN 4016032455233



**USB Type-C connection cable, type C to A M/M, 1.0m, 3A, 480MB, 2.0 Version, bl**


- USB ( )
- USB 2.0 480 MB/s
- 5V3A, 15W
- USB PD ( )
- Type-C,

- AWG: 22
- Color cable: black
- Connector 1: USB A plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 1 m
- Shielding: Unshielded
- USB-C Products: yes

**Attributes**

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	300	11.30	44.00	33.00	22.00	31,944.00
Packaging Unit Inside	10	0.38	28.00	19.00	6.00	3,192.00
Packaging Unit Single	1	0.04	25.00	14.00	0.60	210.00
Net single without Packaging	1	0.03	14.00	11.00	0.50	0.00

**More images:**

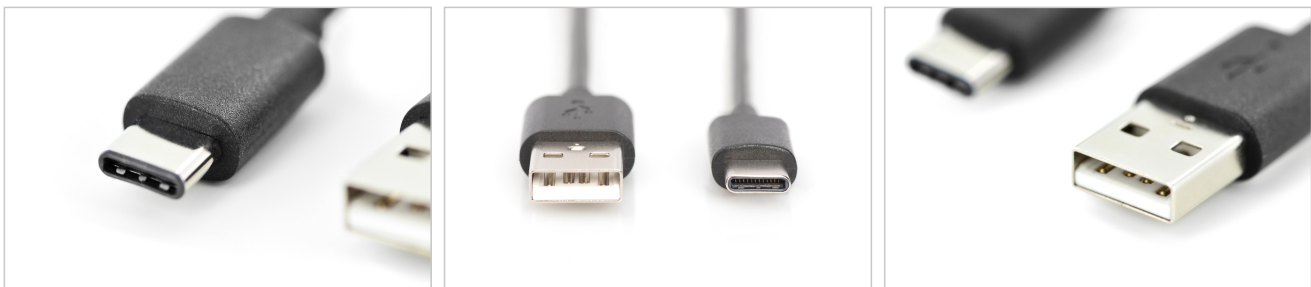



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)