

# DIGITUS® Cabo de ligação USB-C, USB-C - USB-C

AK-300138-030-S

EAN 4016032455998



**Cabo de ligação USB Tipo C, Tipo C - C M/M, 3,0m, 5V/3A 15W, 480MB, Versão 2.0, bw**

Para ligar dispositivos USB-C externos (por exemplo, tablet ou smartphone) ao anfitrião USB-C (por exemplo, PC, computador portátil ou concentrador USB). Taxa de transferência de dados até 480 Mbps (alta velocidade).

**Para sincronização e carregamento super-rápidos**

- Núcleos de cobre, folha e trança blindados para robustez e uma ligação fiável
- Taxa de transferência de dados até 5 Gb/s (SuperSpeed)
- Fonte de alimentação até 5V/3A 15W, 480MB
- Suporta a especificação USB PD (Power delivery)


- A ficha tipo C pode ser utilizada em ambos os lados

**Attributes**

- AWG: 22
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB C, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- USB compliance: USB 2.0
- Length: 3 m
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	10.30	44.00	33.00	22.00	31,944.00
Packaging Unit Inside	10	1.03	20.00	8.00	24.00	3,840.00
Packaging Unit Single	1	0.10	15.00	1.00	17.00	255.00
Net single without Packaging	1	0.09	16.00	15.00	1.00	0.00

**More images:**

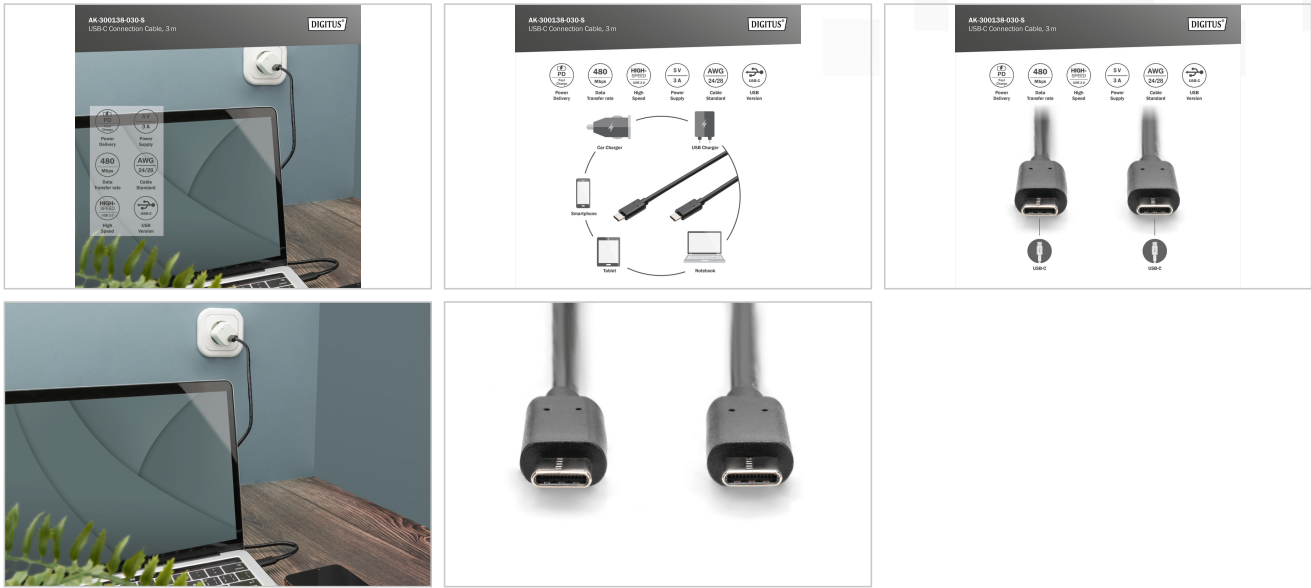

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)