

DIGITUS® Caixa de emenda de fibra ótica, montada, 6x LC-APC DX, OS2

DN-96203-QL

EAN 4016032458319



Painel frontal de fibra ótica, 1U, fecho de liberação rápida, 6x SC DX vertical, cor cinzenta (RAL 7035)

O painel frontal DIGITUS® foi concebido para a caixa de base DN-96200-QL. O painel frontal pode ser facilmente instalado utilizando o material de montagem fornecido com a caixa de emenda. O novo sistema de liberação rápida torna a instalação mais fácil do que nunca.

A caixa de emenda de fibra pré-equipada permite uma instalação rápida, reduz o tempo de configuração e garante uma elevada fiabilidade, protegendo as emendas de fibra e minimizando a perda de sinal.

- for vertical mounting of respective couplers

Attributes


- Assembly: Splice Box
- Color: light grey, RAL 7035
- Connector type: LC / APC / duplex
- Number of fibers: 6
- Type: fixed

Package contents

- 1x painel frontal

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 50 | 16.00 | 46.00 | 16.00 | 16.00 | 11,776.00 |
| Packaging Unit Inside | 1 | 0.32 | 2.50 | 45.00 | 5.50 | 618.75 |
| Packaging Unit Single | 1 | 0.32 | 2.50 | 45.00 | 5.50 | 618.75 |
| Net single without Packaging | 1 | 0.19 | 1.50 | 43.00 | 4.40 | 0.00 |

More images:

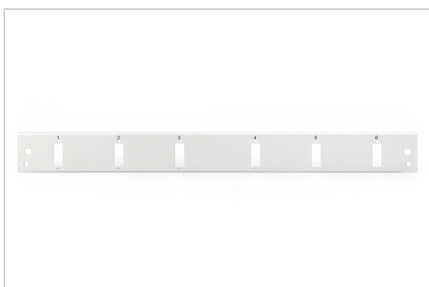

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com