

# DIGITUS® Módulo SFP de cobre Mini GBIC, 10 Gbps, RJ45

DN-81210

EAN 4016032459620



### Módulo de cobre SFP+ 10G, até 100m Suporta a norma 10G, 5G, 2,5G, 1G Base-T

Os módulos transceptores DIGITUS® 10G Mini GBIC SFP oferecem a mais elevada qualidade e fiabilidade. Os módulos oferecem-lhe a oportunidade perfeita para expandir o seu comutador Gigabit com uma ligação RJ45 adicional. Graças à opção hot-plug, pode instalar os módulos durante o funcionamento sem reiniciar ou interrupções. Os módulos também estão em conformidade com o MSA (Multi Source Agreement) e, por conseguinte, podem ser utilizados com os comutadores dos fabricantes mais comuns. Compatível com as seguintes normas: 10GBase-T / 5GBase-T / 2,5GBase-T / 1000Base-T (IEEE802.3 especificado)

### 10 Gigabit Ethernet através de cabo CAT 6A

- Taxa de transferência de dados: 10 Gigabit máx. (compatível com IEEE802.3)
- Normas compatíveis: 10GBase-T, 5GBase-T, 2,5GBase-T, 1000Base-T
- Comprimento do cabo: 1000Base-T: 100 m, 5 / 2,5GBase-T: 50 m, 10GBase-T: 30 m
- Compatível com MSA (Multi Source Agreement)

- Ligação a quente - possibilidade de instalação durante o funcionamento
- Auto MDI/MDI-X
- Temperatura de funcionamento: 0°C a +65°C
- Temperatura de armazenamento: -40°C a 85°C
- Protocolo de comunicação em série: Taxa de relógio I<sup>2</sup>C: 200 Hz
- Compatível com os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE

### Attributes


- Mode: Copper
- Connector: RJ45
- Distance (km): 0.1
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA)
- Ethernet speed: 10 Gigabit

### Package contents

- 1 x Módulo SFP de cobre Mini GBIC 10GBase-T

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	20	0.80	41.00	26.00	16.00	17,056.00
Packaging Unit Inside	1	0.04	3.00	11.50	9.00	310.50
Packaging Unit Single	1	0.04	3.00	11.50	9.00	310.50
Net single without Packaging	1	0.03	5.50	1.20	0.80	0.00

**More images:**

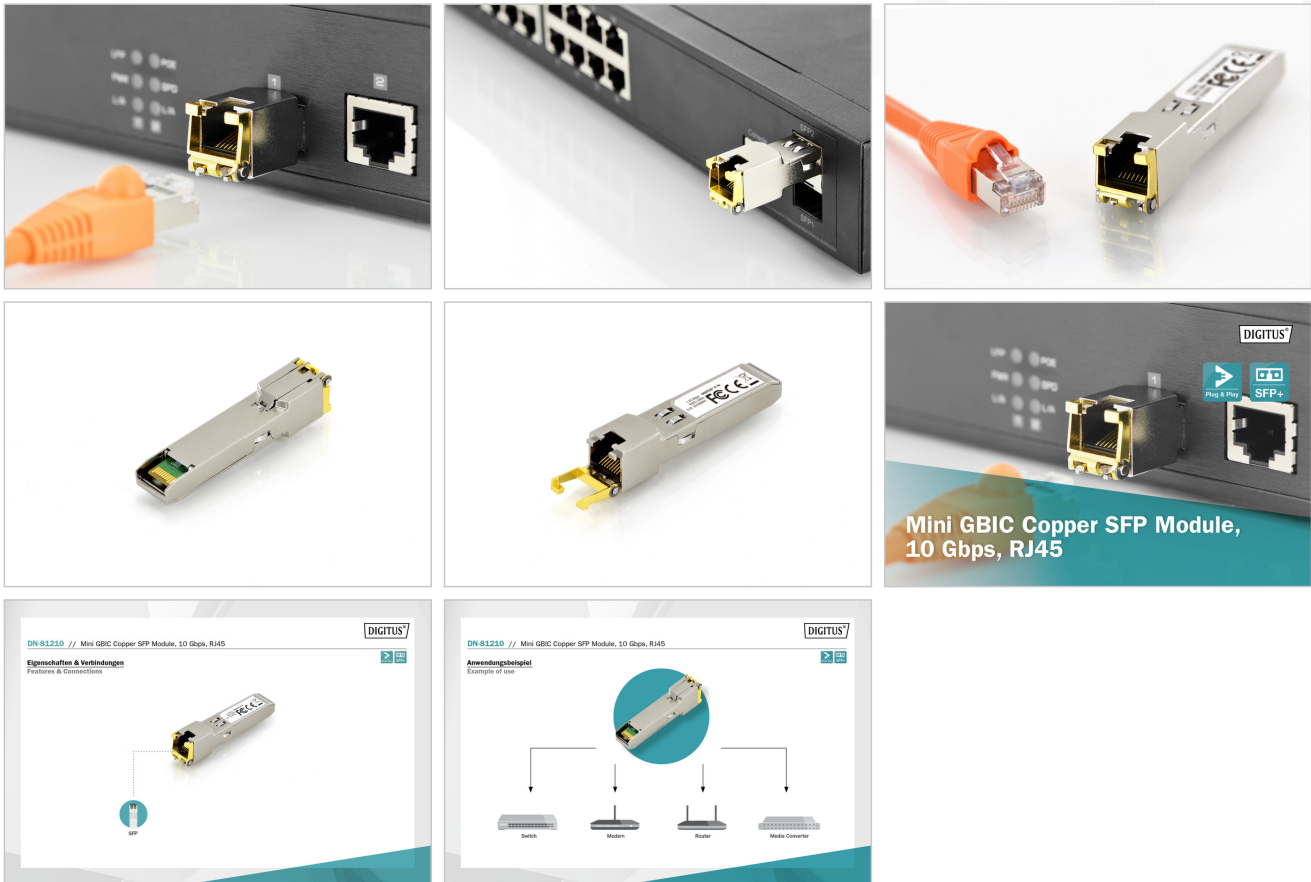

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)