DIGITUS® 10" Gigabit 8-Port L2+ Managed PoE+ Switch

DN-95331

EAN 4016032464365



10 inch 8-Port Gigabit L2+ Managed PoE+ Switch 80 W

The DIGITUS® DN-95331 is a professional 8-port Gigabit PoE+ switch in a compact 10-inch form factor designed for high-performance networks in enterprise, security, and building automation applications. Eight PoE+ ports (IEEE 802.3af/at, up to 30 W per port) provide centralized power to IP cameras, Wi-Fi access points, VoIP phones, and IoT components. Unlike basic PoE switches, the DN-95331 offers comprehensive L2+ management features—VLAN, QoS, IGMP snooping, link aggregation, port mirroring, access control, and traffic control—enabling precise segmentation, security, and prioritization. It is managed via a web GUI, SNMP, or CLI. The fanless metal housing ensures silent, continuous operation. The combination of PoE+, Gigabit performance, and L2+ management makes it the ideal foundation for CCTV systems, digital building infrastructure, and connected workplaces.

Combines professional-grade network security, VLAN segmentation, and PoE+ power delivery in a compact, quiet 10-inch switch.

- Network & Performance
- 8× 10/100/1000 Mbps RJ45 (PoE+)
- PoE Standards: IEEE 802.3af/at, up to 30 W per port, 80 W total
- Non-blocking Gigabit switching, store-and-forward
- Auto-MDI/MDI-X
- Management (L2+)
- VLAN (Port-based / 802.1Q)
- QoS, IGMP Snooping, Broadcast & Storm Control
- Link Aggregation (LACP)
- Port Mirroring, Traffic Rate Limiting
- Port Security & Access Control
- Web GUI, SNMP (v1/v2c, v3 depending on model), CLI/Telnet/SSH
- Firmware & Configuration Backup
- Design & Installation
- Completely fanless
- Metal housing
- 10-inch rack-mount
- Dimensions: approx. 250 × 150 × 42 mm, Weight: approx. 2 kg
- Electrical Systems & Environment
- Internal power supply, 100–240 V AC
- Max. power consumption: approx. 96 W (load-dependent)
- Operating temperature: 0–40 °C; storage temperature: –10–70 °C
- Humidity: 20–85%, non-condensing

Attributes

- Number of ports: 8
- PoE Power budget: 80 W
- PoE standard: IEEE802.3at (PoE+)
- Ethernet speed: Gigabit
- Industrial usage: no
- Installation type: 10 inch, Desktop
- Managed: yes
- Outdoorsuitable: no
- PoE (Power over Ethernet): yes
- Protection against vanadlism: no
- VLAN: yes

Package contents

- DN-95331 Switch
- Power cable
- Quick Start Guide
- Rubber feet

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	8	12.80	33.00	34.50	49.00	55,786.50
Packaging Unit Inside	1	1.60	7.00	24.00	32.00	5,376.00
Packaging Unit Single	1	1.60	7.00	24.00	32.00	5,376.00
Net single without Packaging	1	1.14	4.40	15.00	25.20	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.


More images:










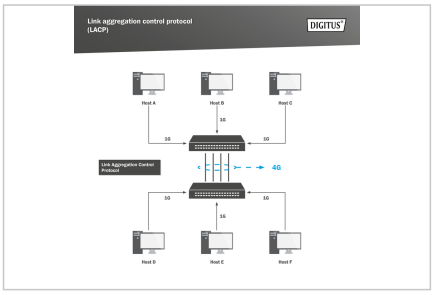





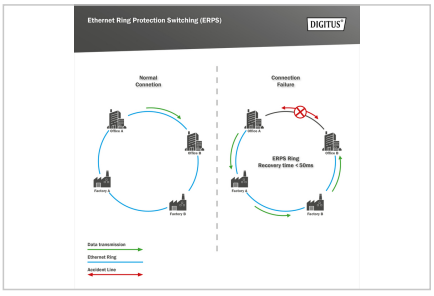





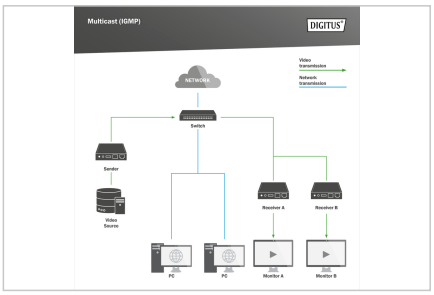

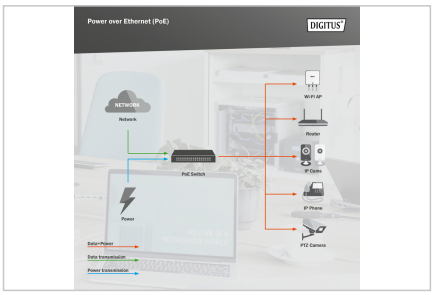

Safety notes

- This product is intended for indoor use only.
- Read all instructions and follow all warnings and instructions on the device.
- Do not place this appliance on an unstable surface (such as a trolley, stand, table, etc.).
- Do not use this appliance near water.
- Do not place this appliance near or above a radiator.
- The housing is equipped with openings for heat dissipation and ventilation. To prevent overheating during operation, the ventilation openings must not be blocked or covered.
- Do not place the appliance on a soft surface (e.g. bed, sofa, blanket, etc.). This will block the ventilation.
- The appliance must not be installed in a closed environment if adequate ventilation is not guaranteed.
- Do not spray any liquids onto the appliance.
- Disconnect the mains plug before cleaning. Do not use any liquid or foam cleaners.
- Clean the appliance with a damp cloth.
- Connect the device according to the power supply on the rating plate.
- To prevent damage to the appliance, it is important that all appliances are properly earthed.
- Do not place any objects on the power cable and lay it in such a way as to avoid tripping hazards.
- Use a surge protector, a regulator or an uninterruptible power supply (UPS) to protect your system from sudden, temporary and reduced power.
- Secure the system cable and mains cable properly and ensure that no objects are pressing on the cable.
- Do not insert any objects into the appliance through the openings in the housing. There is a risk of a short circuit, which can lead to fire or electric shock.
- Do not attempt to repair the appliance yourself. Always contact an authorized customer service centre.
- If any of the following conditions occur, unplug the appliance and send it to an authorized service centre for repair

- The mains cable, power supply unit or plug for the power supply is damaged or worn;
- Liquid has penetrated the appliance;
- The device has been exposed to rain or water;
- The device has been dropped or the housing has been damaged;
- The function of the device has obviously changed;
- The appliance cannot be operated as described in the operating instructions.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com