# DIGITUS® USB-C - HDMI video adapter cable, UHD 4K / 30 Hz

**DA-70821**

**EAN 4016032465072**




**USB-C - HDMI Adapter, 1.8 m 4K/30Hz, black, metal housing**

The USB-C to HDMI adapter cable from DIGITUS® allows you to connect a monitor, projector or TV to the USB-C port on your notebook or tablet. No additional adapters are required. Depending on the source device, this cable supports resolutions of up to 4K / 30 Hz incl. 3D and ARC support. Data transfer rates of up to 5 Gbps and USB 3.1 features are also supported by this cable. Save yourself additional adapters or converters and use the DIGITUS® USB-C to HDMI adapter cable.

**Outputs an HDMI signal in UHD 4K via the USB-C interface**

- Supported resolution: 4K /30 Hz (3840 x 2160p), 1080p@120Hz, 720p, 480p
- Data transfer rate: 5 Gbps
- USB version 3.1 Gen 1
- Supports 4K 3D, Full HD 3D HFR
- Supports ARC
- Supports YUV 4:4:4
- Supports HDCP 2.0
- Supports HDMI 1.4b
- Supported color depth: 12 bit
- Supports Consumer Electronic Control (CEC)
- Supports lip-sync (audio/video synchronization)
- Supports Multi Stream Audio/Video
- Supports 21:9 Cinemascope
- Supports 32 channel audio
- Supports 8-channel LPCM, 192 kHz, 24-bit audio capability
- Supports DTS-HD master audio bitstream
- Supports Super Audio CD (DSD)
- Supports DVD-Audio
- Supports Blu-Ray Disc and HD-DVD audio and video
- Supports EDID 2.0 (device detection)
- Supports DVI version 1.0
- Latency: Zero frame delay
- Power consumption: 250 mW max.
- Compatible operating systems: Windows 10/8/8.1/7, MacOS® (OS X), Android, Chromebook Pixel
- Operating humidity: 20% - 80% RH
- Operating temperature: -10°C ~ +50°C
- Length: 1.8 m
- Cable sheath: PVC
- Plug housing: Aluminum
- Dimensions: L 46 x 37.6 W x H 13.2 mm
- Weight: 62 g
- Manufacturer's instructions:
- Your USB-C equipped device must support DisplayPort video mode (DP Alt Mode) to be compatible with this adapter/converter.
- The video output capability depends on the graphics card of your notebook and the connected monitor. Some monitors also limit the available resolution.

**Attributes**

- AWG: 34
- Feritni filtar: nema
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Konektor 1: USB C, utikač
- Konektor 2: HDMI tip A, utikač
- Površina konektora: pozlaćeno
- USB sukladnost: USB 3.0 / 3.1
- Duljina: 1.8 m
- oklop: dvostruki oklop

**Package contents**

- USB-C - HDMI video adapter cable, UHD 4K / 30 Hz

| Logistics | | | | | | |
|---|---|---|---|---|---|---|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| **Packaging Unit Carton** | 80 | 7.50 | 38.10 | 30.20 | 31.10 | 35,784.30 |
| **Packaging Unit Inside** | 10 | 0.94 | 22.50 | 15.00 | 15.00 | 5,062.50 |
| **Packaging Unit Single** | 1 | 0.09 | 22.50 | 15.00 | 1.50 | 506.25 |
| **Net single without Packaging** | 1 | 0.06 | 22.00 | 18.00 | 0.50 | 0.00 |

**More images:**





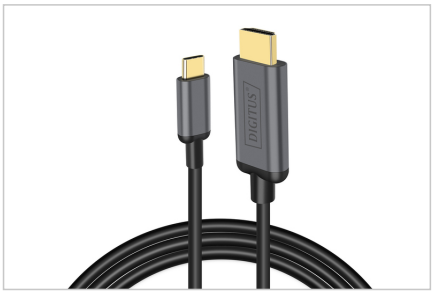


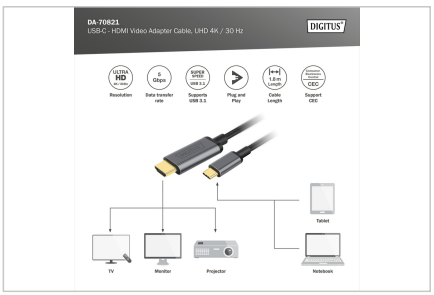


**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com