

DIGITUS Smart PDU, 8 x C13, LCD info panel, WebUI, RJ45, RJ11, Sensor option

DN-95610

EAN 4016032467403



Smart PDU with 8 x C13, LCD, WebUI, RJ45 1.5mm, 2m mains, remote monitoring

Smart power distribution (Smart PDU) from DIGITUS® allows you to monitor and control the total flow of electricity. In addition to monitoring the total current and individual currents, the voltage and frequency can also be monitored. You can also define specific limits for all plugs or for individual plugs. Delayed switch-on and timed switch functions are also available. Configuration is accomplished using remote access via the integrated web interface (RJ45). A variety of interfaces are available to access the device including RJ45, RS485 and a digital input/output interface. Separately available sensors for temperature/moisture or smoke/water can be connected to the RJ11 ports. These optional sensors can be configured individually with threshold limits and corresponding notification rules. Thanks to the installation brackets, the DIGITUS® Smart PDU is easy to install in 19" server cabinets or wall housing. The installation brackets come pre-assembled.

Smart power distribution, 8-fold with remote access via web interface - monitoring, controlling, limit values and alarm functions

- Smart power distribution system with integration configuration interface (WebUI)
- Monitoring: Total current, individual current, active/inactive, electricity meter (kW/kWh), frequency




- Control: Switching on/off the individual plugs, delay, timed switch
- Configuration: Delayed switch on/off, reset Total power consumption, setting limits
- Alarm: Total current at limit, individual current for specific plug at limit, temperature/humidity limit, smoke, water
- Alarm notification: Email and alarm tone
- Temperature, smoke and water sensors available separately
- Connections:
 - RJ45: Ethernet connection TCP/IP (to router, switch)
 - RJ11: Sensors (temperature, humidity)
 - RJ11: Sensors (smoke, water)
 - RJ11: DI/O (Digital Input/Output interface)
 - RS485: Serial interface
 - USB B: Firmware/debugging consoles port
- Integrated fuse to protect against surges and excess current: 220 V / 1 A (10Ω)
- Plugs for non-heating appliances: 8 x C13
- Mains cable: 2 m with safety plug / C13 plug
- Dimensions: 48.26 x 5 x 16 cm (LxHxD)
- Weight: 3 kg

Package contents

- 1 x Smart PDU, 8xC13
- 1 x Connection cable
- 1 x Mounting accessories (pre-assembled)
- 1 x User manual

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	3	13.00	35.00	55.00	30.00	57,750.00
Packaging Unit Inside	1	4.33	0.00	0.00	0.00	0.00
Packaging Unit Single	1	4.33	28.00	52.00	9.00	13,104.00
Net single without Packaging	1	0.00	5.00	48.50	16.00	0.00

More images:

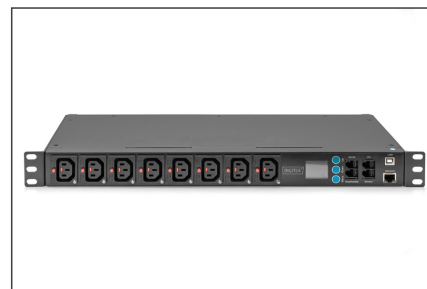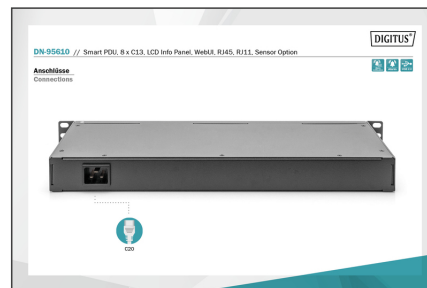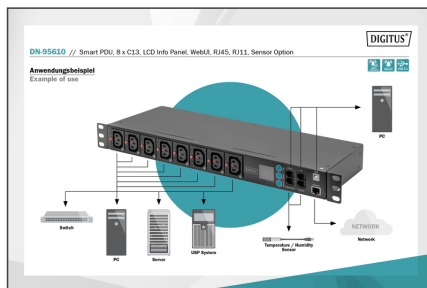

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com