

DIGITUS® Régua de tomadas de 10" com perfil de alumínio, tomada de 4 vias com contacto de terra

DN-95418

EAN 4016032474777



PDU de alumínio 1U, montagem em bastidor de 254 mm (10"), 4x contacto de ligação à terra, 16A, 4000W, 250VAC 50/60Hz

As régua de energia DIGITUS® são a solução perfeita para a sua rede ou armário de servidor. Em termos de distribuição de energia, a PDU preenche os requisitos de muitas aplicações em TI, tecnologia de rede, laboratórios e em casa. A régua de tomadas pode ser montada na área de 10" do armário num espaço económico de 1U. Consoante o tipo de armário, é possível montar a régua de tomadas com as torneiras viradas para a direita ou para a esquerda.

Alimentação eléctrica segura e profissional na gama de 10

- Instalação horizontal de 10" no bastidor
- Caixa: Perfil de alumínio
- Componentes de plástico em ABS UL-94V-0
- Entrada: ficha de contacto de ligação à terra CEE 7/7, 230 Vac / 16 A
- Saída: tomadas de aparelhos 4 x tomada com contacto de terra DIN 49440, máx. 16 A por saída

- Cabo de alimentação: secção do cabo: 1,5 mm², comprimento: 2 m
- Dimensões: 254 mm (10") x 45 (1U) x 45 mm (HxWxD)

Attributes

- Current: 16 A
- Input Plug: CEE7/7
- Installation: Rack 1U
- Outlets: CEE 7/3
- Phase: 1ph
- Power: 3,6 kVA
- Volts: 230 V
- Inch form factor (IEC 60297): 254 mm (10")


Package contents

- 1 régua de tomadas de 10", tomada de 4 vias com contacto de terra
- 2 x perfis angulares para a montagem do armário

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	10	7.00	30.00	52.00	48.50	75,660.00
Packaging Unit Inside	1	0.70	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.70	9.70	51.00	5.80	2,869.26
Net single without Packaging	1	0.80	4.50	25.40	4.50	0.00

More images:

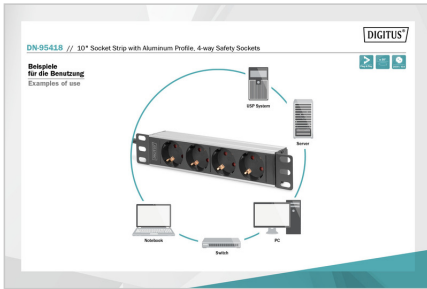

Safety notes

- This product is not intended for unsupervised use by children or persons under their care!
- Prevent higher humidity or temperatures than those specified in the data sheet - Avoid moisture, dust or vapors, solvents, flammable gases.
- Multiple sockets are not designed for permanent use with heavy loads!
- Multiple sockets must not be cascaded (avoid stringing together several multiple sockets).
- The maximum connected load must not be exceeded.
- Defective multiple sockets must be taken out of service immediately and disposed of in an environmentally friendly manner.
- In the event of a fault, take the product out of operation and contact a qualified electrician.
- Do not open the product.
- Disconnect the product from the power supply before cleaning. Do not use any aggressive or abrasive cleaning agents for cleaning.
- The ingress of liquids can lead to a short circuit.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schöffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com