

DIGITUS Universal TV Ceiling Mount with Telescopic Height-Adjustment

DA-90421
EAN 4016032475095



Monitor/TV Ceiling Mount 37-70", 50 kg max, 560-910 mm, black

The fully flexible Universal Ceiling Bracket from DIGITUS® leaves nothing to be desired. It is suitable for flat and curved displays with a screen diagonal from 37" to 70" and a weight of 50 kg. It can be optimally adjusted to different ceiling heights with telescopic height adjustment. The bracket can also be adapted to sloping roofs with an incline of up to 60° and can be swiveled by 360°. An optimal viewing angle is ensured by the variable inclination, which can be adjusted from 0 to -25° depending on the ceiling height and desired viewing angle. Installation is facilitated by the VESA bracket with quick release, as the display is clipped in to the corresponding mounts along with the installed VESA bracket. Clean cable management is provided within the telescopic structure. An integrated level helps with fine-tuning. The ceiling bracket can be used for VESA dimensions 200x200 to 600x400.

Variable Ceiling Bracket for Flat and Curved Displays up to 70" / 50 kg, Height-Adjustable

- Suitable for TVs/monitors with dimensions between 37" and 70"
- Maximum load capacity: 50 kg max.
- Quick release function - simple fitting and removing of displays
- VESA mounting dimensions: 200x200, 300x300, 400x200, 400x400, 600x400

- Swivel range: 360° (+180° to -180°)
- Inclination range: -25° to 0° (for optimal viewing angle)
- Rotation range: +3° to -3° (for fine-tuning)
- Maximum height adjustment: 56 - 91 cm (midpoint from VESA bracket to mounting plinth)
- Mounting plinth suitable for sloping roofs: inclination adjustable from +60° to -60°
- Cable management: Within the tube structure
- Material: Steel
- Dimensions: W 68 x D 43.5 x H 113 cm
- Weight: 5.5 kg
- Color: Black

Attributes

- Monitor weight (max.): 50 kg
- Number of monitors: 1


Package contents

- 1 x Universal TV Ceiling Bracket with Telescopic Height Adjustment
- 1 x Mounting accessories
- 1 x QIG

Logistics

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| Packaging Unit Carton | 3 | 22.40 | 38.50 | 78.00 | 45.50 | 136,636.00 |
| Packaging Unit Inside | 1 | 7.47 | 36.50 | 76.00 | 14.50 | 40,223.00 |
| Packaging Unit Single | 1 | 7.47 | 36.50 | 76.00 | 14.50 | 40,223.00 |
| Net single without Packaging | 1 | 5.45 | 43.50 | 68.00 | 112.80 | 0.00 |

More images:

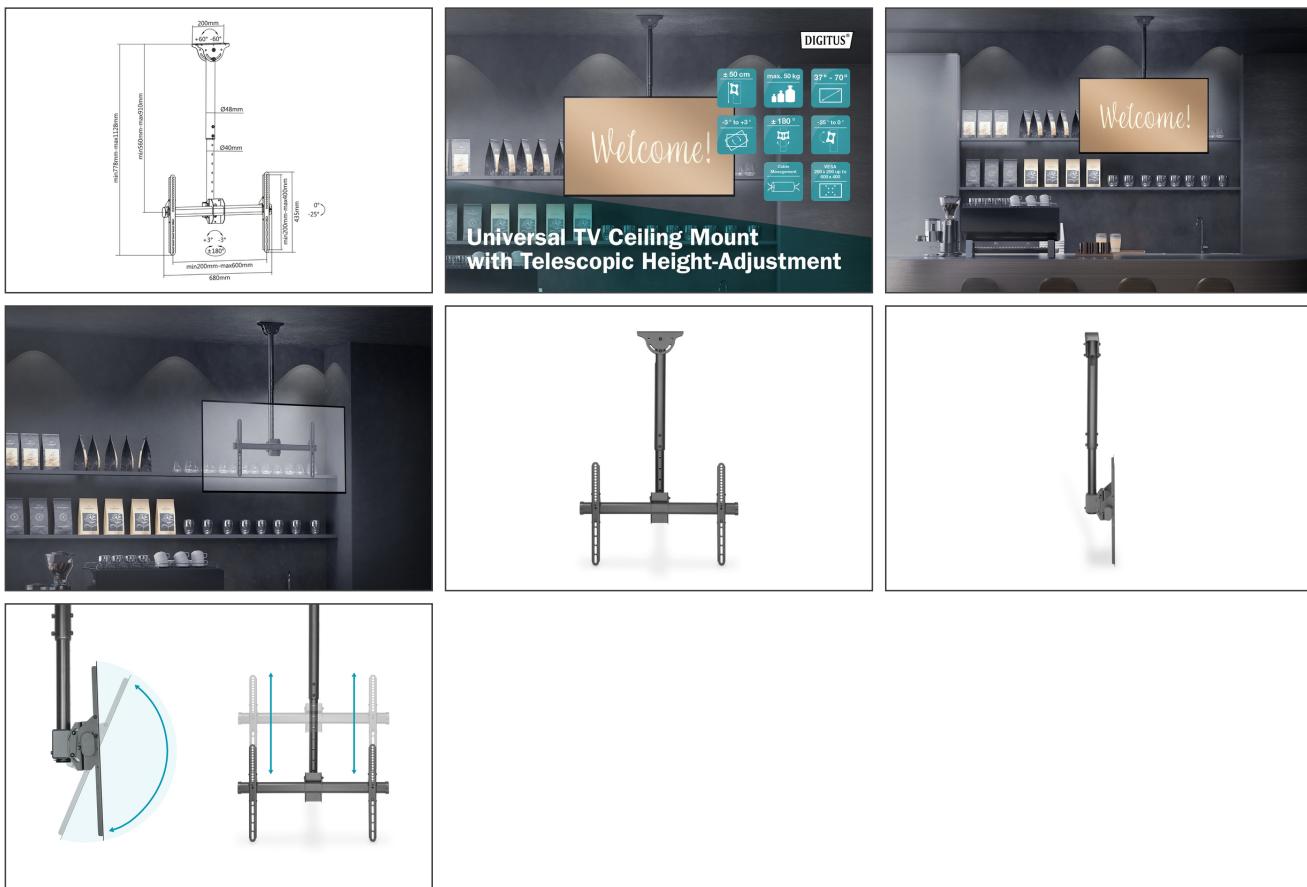

Safety notes

- Please read the entire manual before starting assembly and installation. Please contact your local dealer if you have any questions about the instructions or warnings.
- CAUTION: Use with products that exceed the permitted weight may result in damage or possible injury.
- Brackets should be fitted in accordance with the installation instructions. Incorrect installation can result in damage or injury.
- Use safety equipment and suitable tools. The product should only be installed by specialists.
- This product can be installed on timber-framed, solid concrete or stone walls.
- The load-bearing surfaces should be able to safely withstand the entire weight of appliances and all additional components.
- Only use the installation screws supplied and DO NOT TIGHTEN the screws TOO TIGHT.
- This product contains small parts that can cause a choking hazard if swallowed. Keep these parts away from children.
- Only use this product indoors. Using the product outdoors can lead to injuries and damage.
- IMPORTANT: Before installation, please check all components received against the components list. If parts are damaged or missing, ask your local dealer for replacement parts.
- MAINTENANCE: Check the bracket regularly for safety and stability (preferably every three months).

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com