
DIGITUS® SFP28 25G 3m DAC Cable

DN-81243

EAN 4016032478805

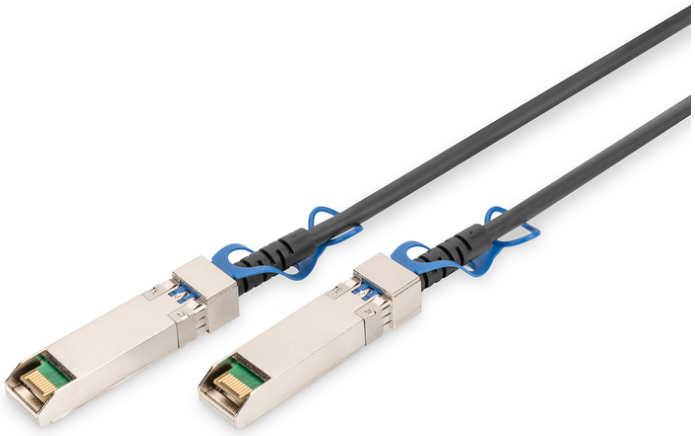

DAC Cable SFP28 3 M DAC Cable 25 G 3m

25G SFP28 DAC Twinax cables are a powerful, energy-saving solution for 25G Ethernet applications, switches, high-performance computer, data acquisition systems and telecommunications systems. It consists of a shielded Twinax copper cable with pluggable connections on both ends. Passive DAC cables have no electrical components in the cable and are suitable for short transmission distances.

The SFP28 25G cable is suitable for connections between two SFP28 ports in 25G network components

- Transmission channels: RX and TX
- Connections: SFP28
- data rates of up to 25.88 Gbps supported
- Temperature range: 0 to 70°C
- Storage temperature range: -40 to 85°C
- Power: +3.3 V supply voltage
- Power consumption: 0.5 W
- Compatible with MSA SFP28
- Electrical interface: 20-pole connector plug
- Management interface: Serial, I²C
- The connection is compatible with the SFF-8432 specification
- Compatible with the following manufacturers: Allnet, CISCO, 3COM, D-LINK, Dell, Edimax, Etherwan, ENTERASYS, EXTREME, FINISAR, FORCE 10, Fortinet, HUAWEI, IBM, JUNIPER, LINKSYS, NETGEAR, NORTEL, RIVERSTONE, ZTE, ZYXEL

Attributes

- AWG: 30
- Length: 3 m
- DDM Support: no
- Manufacturer compatibility: Cisco
- Connection: SFP+
- Ethernet speed: 25 Gigabit

Package contents

- SFP28 25G DAC Cable 3 m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	100	15.00	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.15	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.15	26.00	26.00	4.00	2,704.00
Net single without Packaging	1	0.17	5.80	1.40	1.10	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com