DIGITUS® 4K HDMI adapter - HDMI to DisplayPort

AK-330101-002-S

EAN 4016032481102



HDMI Adapter, Type HDMI - DP M/M, 0.3m, ext. Power supply, 4K@60Hz, bl

With the DIGITUS 4K HDMI Adapter - HDMI to DisplayPort, you can connect your laptop to a second monitor, giving you an additional screen for more efficient work. Documents, spreadsheets and websites can be displayed on multiple screens. The adapter cable supports resolutions up to 4K at 60 Hz. Enjoy razor-sharp picture quality with richer colors and much more detail than with conventional HDs. The adapter transmits Ultra HD content to your DisplayPort monitor and supports 7.1-channel surround audio. The HDMI source can supply this product with sufficient power under most circumstances, the USB-A port is only connected when there is not enough power.

Connect this high performance HD digital audio/video adapter to your HDMI output device with your DP input device.

- Supports: Resolutions up to 4K@60Hz.
- Supports: Resolutions up to 2K@60Hz.
- Supports: Resolutions up to 1920 x 1080 @ 120 Hz.
- Supports: 7.1-channel surround audio.
- Supported color depth: 48 Bit Deep Color
- Supports: 3D video timings
- Supported: eDP-operator
- Supports: Video Convert - RGB / YCC (4:4:4) => 16-bit color
- Supports: Color conversion -YUV to RGB and from RGB to YUV
- Compatible with HDMI 2.0 and DisplayPort 1.2
- Compatible with HDCP 1.4 and DPCP
- Connection 1: HDMI type - A (plug)
- Connection 2: DisplayPort (plug)
- Connection 3: USB- A (power supply)(plug)
- Length: 0.2m
- Color: Black
- AOC - Active optical cable: No

Attributes

- AWG: 32
- Color cable: black
- Connector 1: HDMI type A, plug
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: plastic
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Package contents

- 1x 4K HDMI adapter - HDMI to DisplayPort

Logistics


	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	300	14.00	32.00	50.00	21.00	33,600.00
Packaging Unit Inside	10	0.47	4.00	30.00	20.00	2,400.00
Packaging Unit Single	1	0.05	2.00	32.50	1.00	65.00
Net single without Packaging	1	0.04	0.60	21.00	11.50	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:





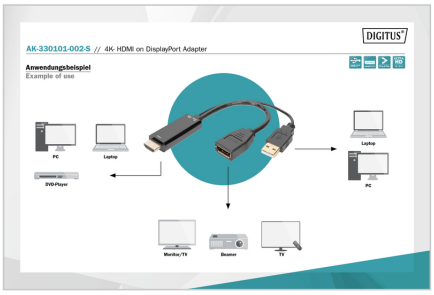

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com